


TO-92 Encapsulate Three-terminal Voltage Regulator

Features

- Maximum output current
 $I_{OM}: 0.1A$
- Output voltage
 $V_O: 5V$
- Continuous total dissipation
 $P_D: 0.625 W (T_a = 25^\circ C)$

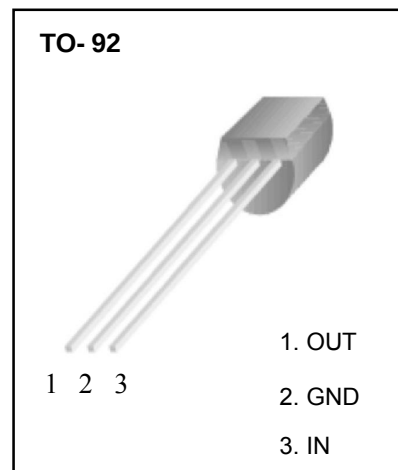

Limiting Values (Absolute Maximum Rating)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	30	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	160	$^\circ C/W$
Operating Junction Temperature Range	T_{OPR}	-40~+125	$^\circ C$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ C$

Electrical Characteristics (T=25 $^\circ C$ Unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit		
			25℃	4%	4.80	5.0	5.20	V
				3%	4.85	5.0	5.15	V
				2%	4.90	5.0	5.10	V
Output voltage	Vo	7V≤Vi≤20V, Io=1mA~40mA	0-125℃	4.75	5.0	5.25	V	
		Io=1mA~70mA		4.75	5.0	5.25	V	
Load Regulation	ΔVo	Io=1mA~100mA	25℃		15	60	mV	
		Io=1mA~40mA	25℃		8	30	mV	
Line regulation	ΔVo	7V≤Vi≤20V			32	150	mV	
		8V≤Vi≤20V	25℃		26	100	mV	
Quiescent Current	Iq		25℃		3.8	6	mA	
Quiescent Current Change	ΔIq	8V≤Vi≤20V	0-125℃			1.5	mA	
	ΔIq	1mA≤Vi≤40mA	0-125℃			0.1	mA	
Output Noise Voltage	VN	10Hz≤f≤100KHz	25℃		42		μV/Vo	
Ripple Rejection	RR	8V≤Vi≤20V,f=120Hz	0-125℃	41	49		dB	
Dropout Voltage	Vd		25℃		1.7		V	







* Pulse test.

TYPICAL APPLICATION

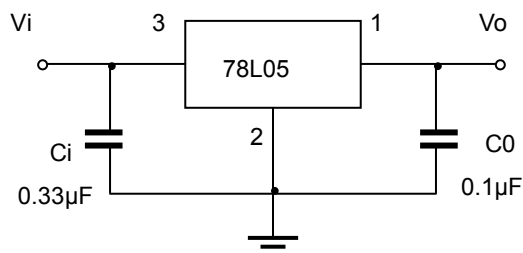


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

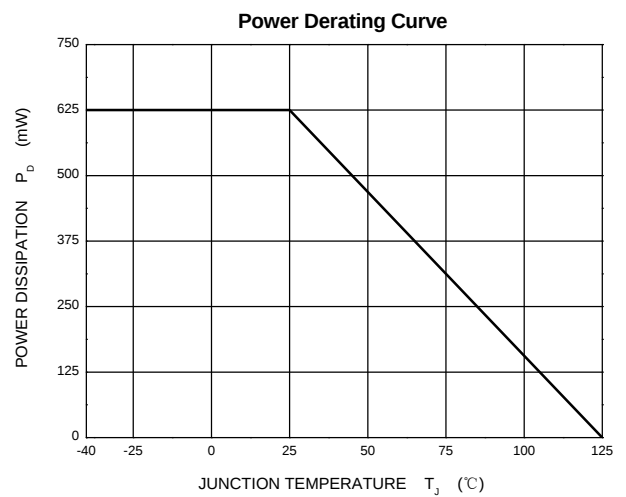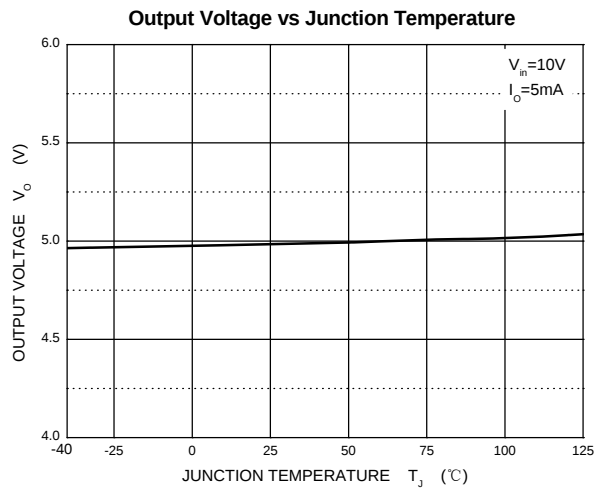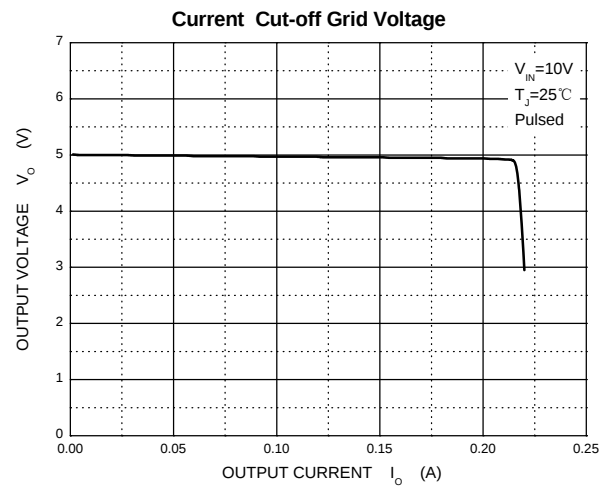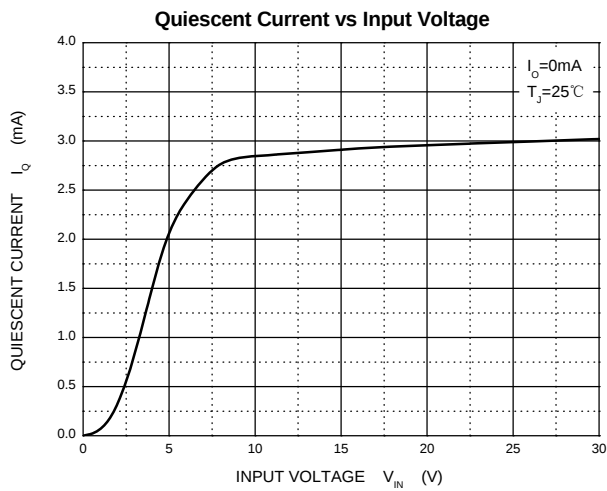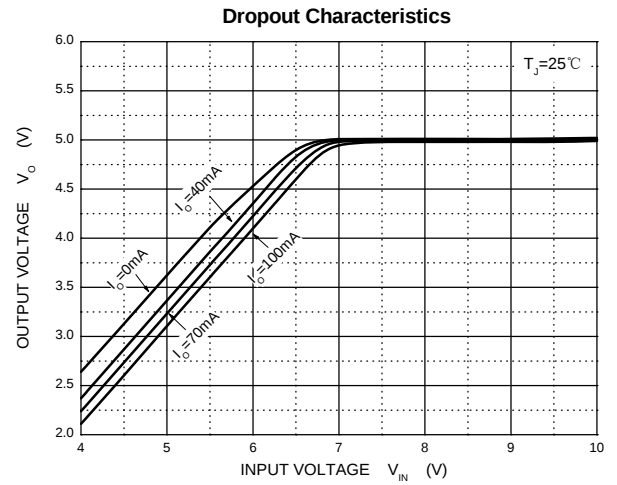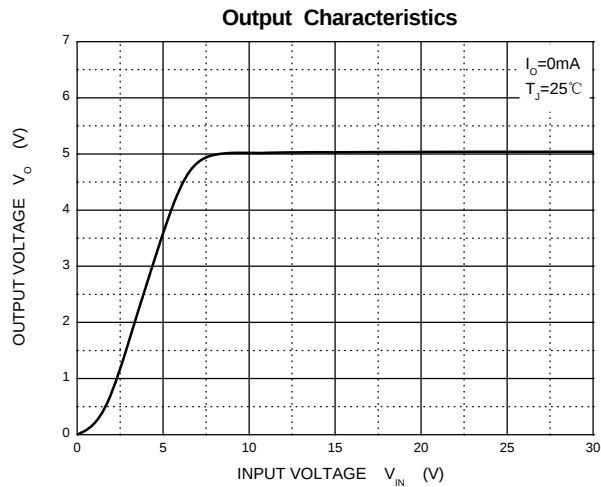


TO- 92 Package Outline Dimensions

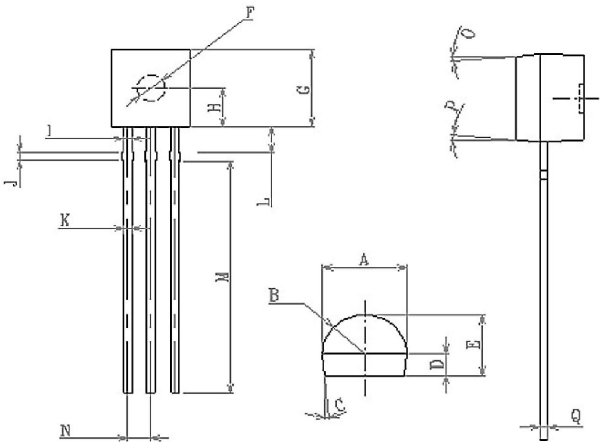

SYMBOL	MIN	MAX	SYMBOL	MIN	MAX
A	4.1	4.3	K	0.36	0.56
B	R2.0	R2.2	L	1.35	1.45
C	4.1		M	12.00	12.5
D	1.1	1.2	N	1.24	1.3
E	3.13	3.33	O	5°	
F	Φ 1.48	Φ 1.52	P	5°	
G	4.4	4.6	Q	0.37	0.39
H	2.2	2.3			
I	0.36	0.56			
J	0.5	0.6			

单位: mm

TO- 92 Suggested Pad Layout

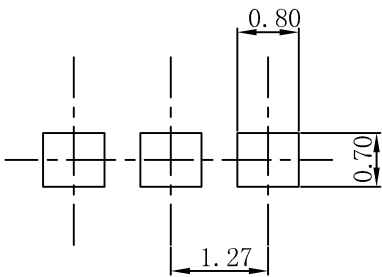


- Note:**
- 1.Controlling dimension:in millimeters.
 - 2.General tolerance:± 0.05mm.
 - 3.The pad layout is for reference purposes only.


NOTICE

JSHD reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein .JSHD does not assume any liability arising out of the application or use of any product described herein.

TO-92 Tape and Reel

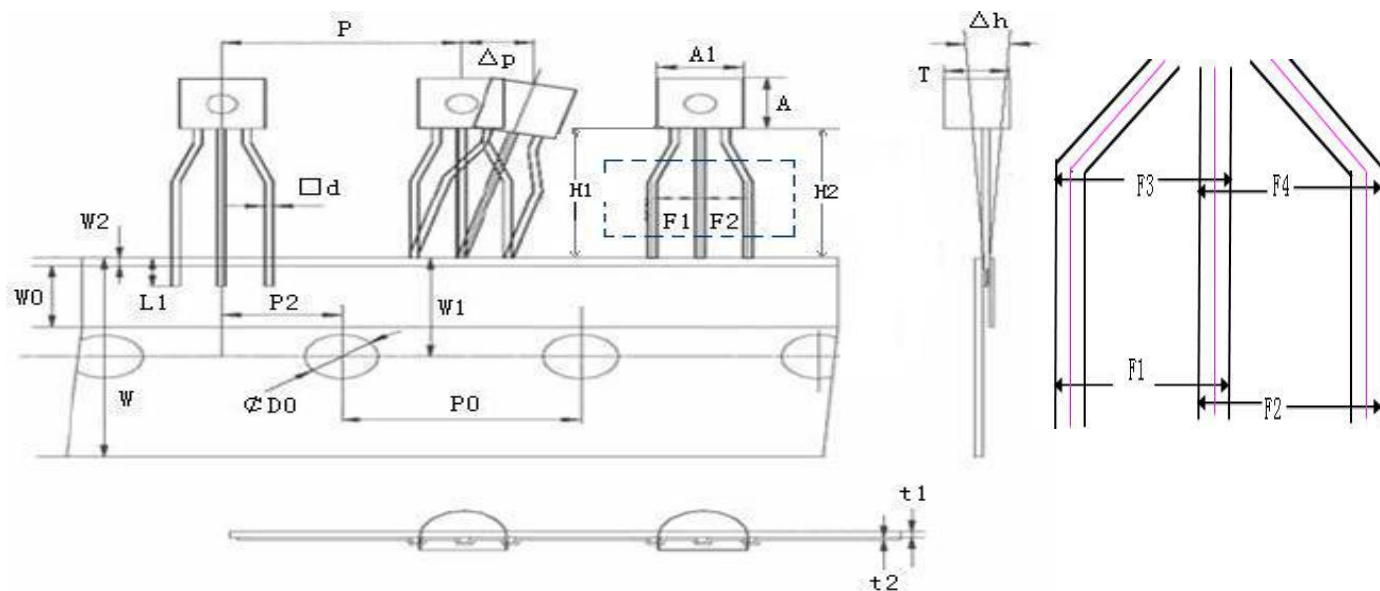

Symbol	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	4.1	4.2	4.3	0.171	0.176	0.180
A	4.4	4.5	4.6	0.184	0.188	0.192
T	3.13	3.23	3.33	0.131	0.134	0.139
$\square d$	0.36	0.45	0.56	0.015	0.018	0.022
L1	2.5	—	—	0.098	—	—
P	12.4	—	13	0.488	—	0.512
P0	12.5	12.7	12.9	0.492	0.5	0.508
P2	6.05	6.35	6.65	0.238	0.25	0.262
F1,F2	2.75	3.00	3.25			
F3,F4	2.75	3.00	3.25			
F1-F2	—	—	0.4			

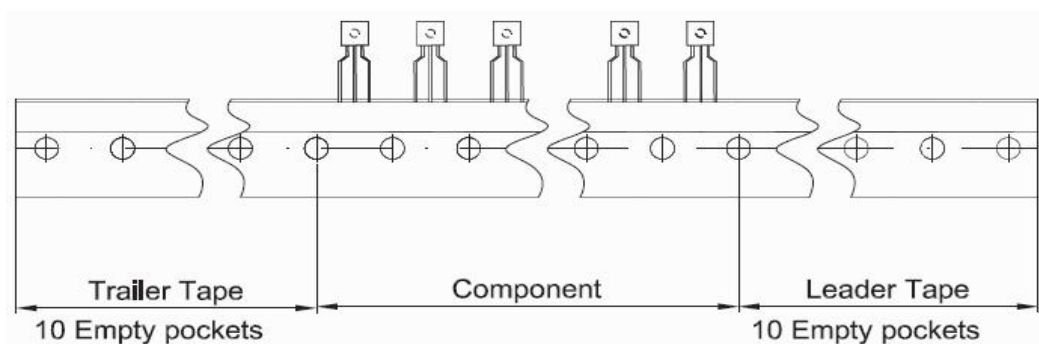

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000PCS	343×158×42	20000PCS	470×358×180