


DBS Plastic-Encapsulate Bridge Rectifier

Features

- I_o 1.0A
- V_{RRM} 50V-1000V
- Low forward voltage drop
- High surge current capability
- Glass passivated chip junction

Mechical Data

- Case: DBS molded plastic
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL- STD-202, Method 208
- Polarity: As marked on case

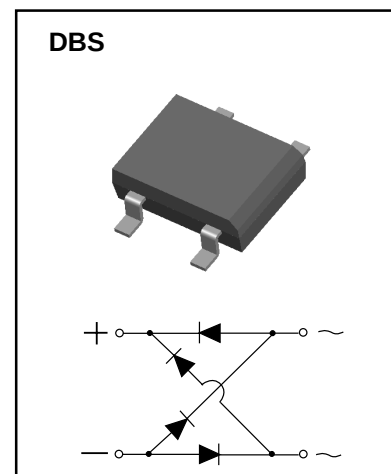

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	DB1						
				01SZ	02SZ	03SZ	04SZ	05SZ	06SZ	07SZ
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
Maximum DC Blocking Voltage	V_{DC}	V		50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V		35	70	140	280	420	560	700
Average Rectified Output Current	I_o	A	60Hz sine wave, R-load, $T_L=100^{\circ}C$	On glass-epoxi substrate						
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz sine wave, 1 cycle, $T_j=25^{\circ}C$	1.0						
Current Squared Time	I^2t	A^2S	$1ms \leq t < 8.3ms$ $T_j=25^{\circ}C$, Rating of per diode	35						
Storage Temperature	T_{stg}	$^{\circ}C$		5.08						
Junction Temperature	T_j	$^{\circ}C$		-55 ~+150						

Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	V_{FM}	V	$I_{FM}=1.0A$, Pulse measurement, Rating of per diode	1.1
Peak Reverse Current	I_{RRM}	μA	$V_{RM}=V_{RRM}$, Pulse measurement, Rating of per diode	5
Thermal Resistance	$R_{\theta J-A}$	$^{\circ}C/W$	Between junction and ambient, On glass-epoxi substrate	68
	$R_{\theta J-L}$		Between junction and lead	15

Typical Characteristics

FIG1: I_O - T_a Curve

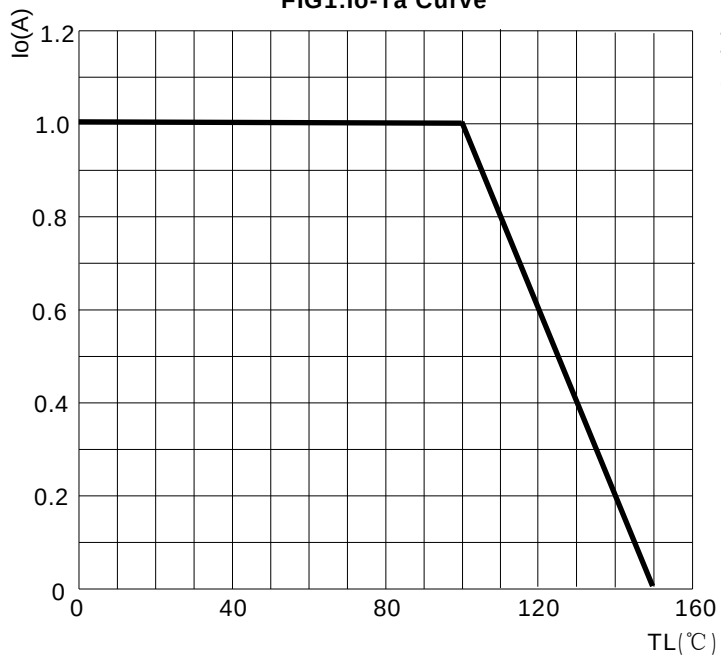


FIG2: Surge Forward Current Capability

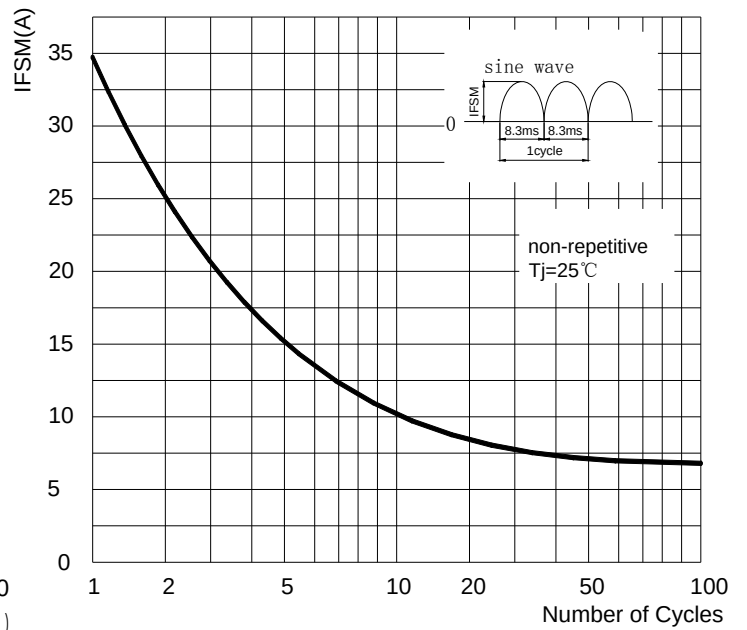


FIG3: Forward Voltage



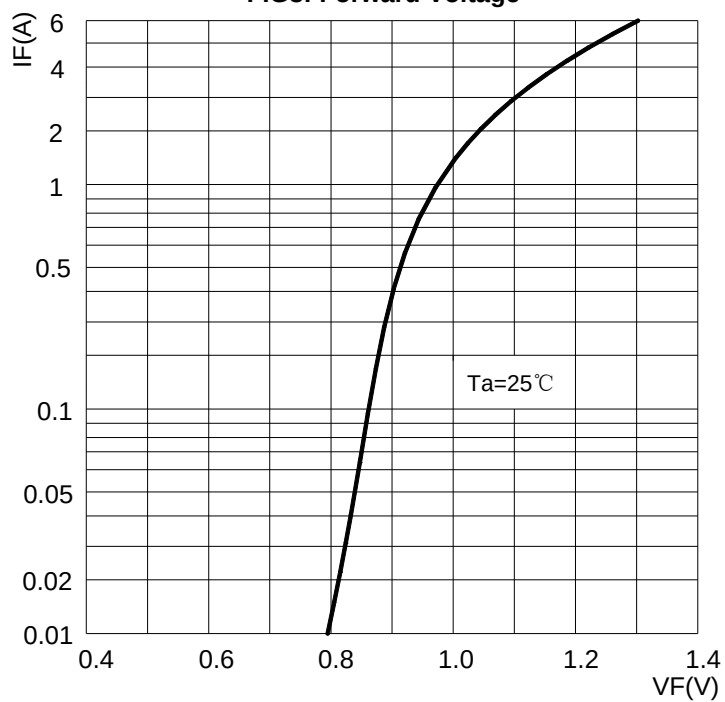


FIG4: Typical Reverse Characteristics

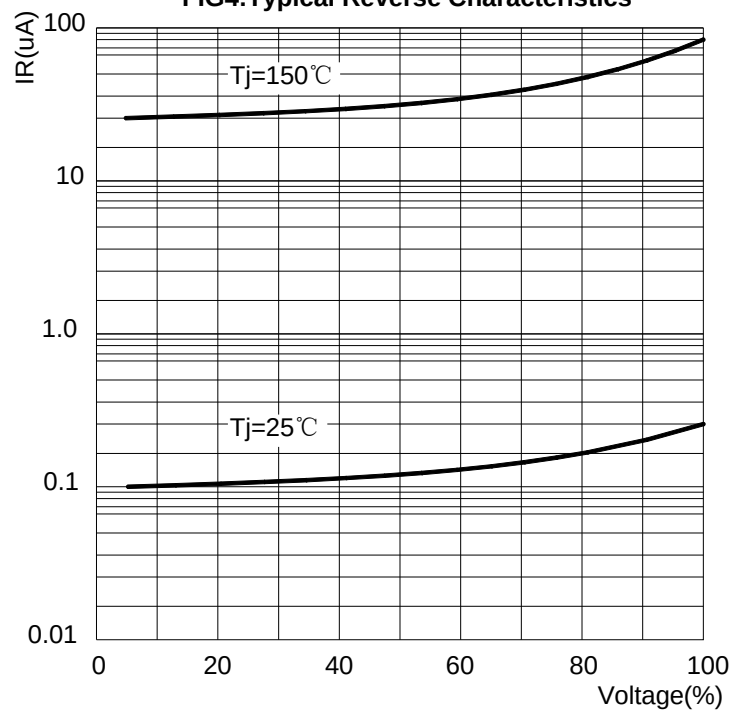


DBS Package Outline Dimensions

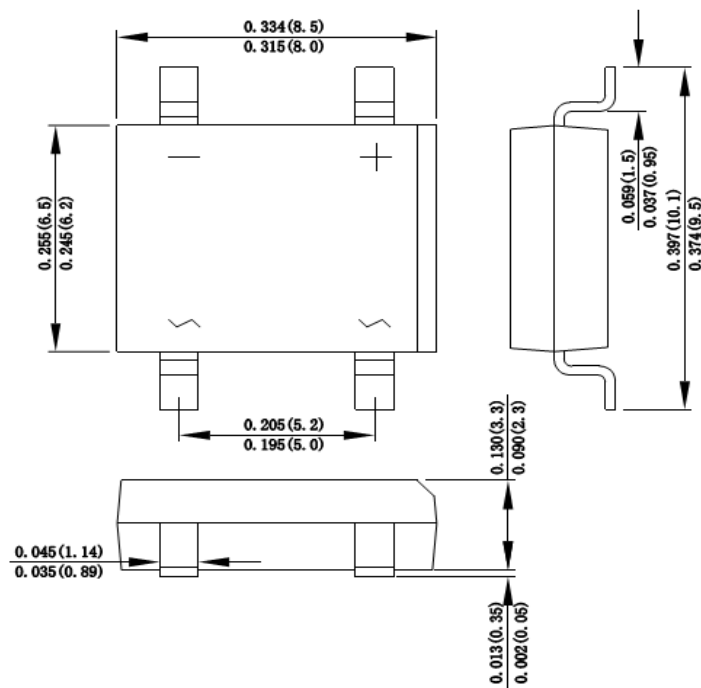

Dimensions in inches and (millimeters)

DBS Suggested Pad Layout

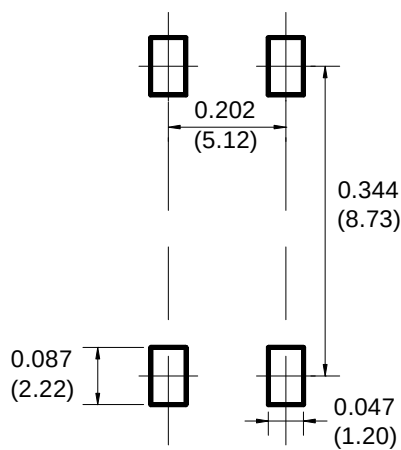


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

Ordering Information

Part Number	Package	Shipping Quantity
DB101SZ- DB107SZ	DBS	1500/tape&Reel

Marking Diagram

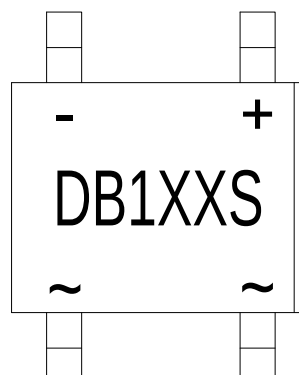

XX: From 01 to 07