

TO-247-2L Plastic-Encapsulate Diodes

HYPERFAST RECTIFIER,FRED

MAIN CHARACTERISTICS

I_O	30A
V_{RRM}	1200V
T_{rr}	60ns
T_j	175°C
$V_{F(typ)}$	2.6V


FEATURES

- Ultrafast Recovery Times and Low Recovery Loss
- Low Forward Voltage
- Low Reverse Leakage Current


APPLICATIONS

Specifically designed to improve efficiency of PFC and output rectification stages of EV / HEV battery charging stations, booster stage of solar inverters and UPS applications, these devices are perfectly matched to operate with MOSFETs or high speed IGBTs.

MARKING



MURW30H120 = Device code
Solid dot = Green molding compound device
if none, the normal device
XXXX = Code

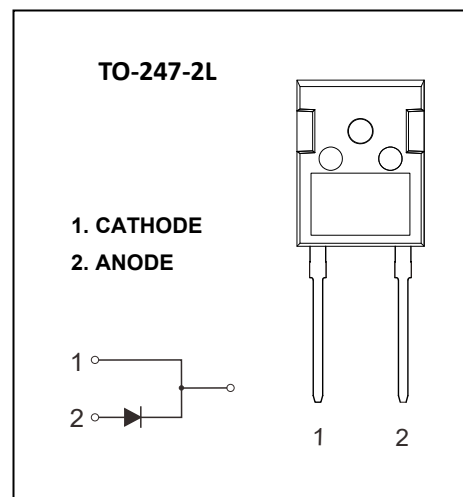

MAXIMUM RATINGS ($T_c=25^{\circ}\text{C}$ unless otherwise noted)


Symbol	Parameter	MURW30H120	Unit
V_{RRM}	Peak Repetitive Reverse Voltage	1200	V
V_R	DC Blocking Voltage		
$I_{F(AV)}$	Average Forward Current($T_c=112^{\circ}\text{C}$)	30	A
$I_{F(RMS)}$	RMS Forward Current($T_c=112^{\circ}\text{C}$)	42	A
I_{FSM}	Non-Repetitive Surge Forward Current (8.3ms)	300	A
P_D	Power dissipation	188	W
$R_{\theta JC}$	Thermal Resistance From Junction to Case	0.8	$^{\circ}\text{C}/\text{W}$
T_j	Operating Junction Temperature Range	-55 ~ +175	$^{\circ}\text{C}$
T_{stg}	Storage Temperature Range	-55 ~ +175	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=100\mu\text{A}$		1200			V
Reverse current	I_R	$V_R=1200\text{V}$	$T_j=25^{\circ}\text{C}$		0.05	1.0	μA
			$T_j=125^{\circ}\text{C}$		50		μA
Forward voltage	V_F	$I_F=30\text{A}$	$T_j=25^{\circ}\text{C}$		2.6	3.5	V
Reverse recovery time	t_{rr}	$I_F=0.5\text{A}, I_R=1\text{A}, I_{rr}=0.25\text{A}$				60	ns

TO-247-2L Package Outline Dimensions

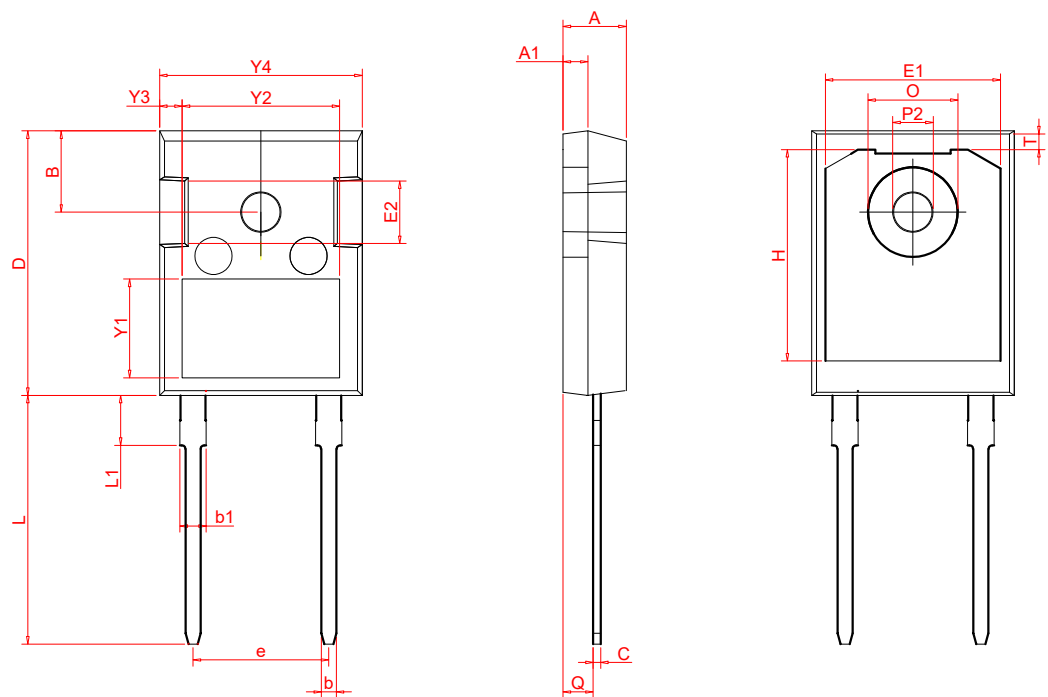

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.70	5.30	0.185	0.209
A1	1.70	2.30	0.067	0.091
C	0.45	0.75	0.018	0.030
Q	2.20	2.60	0.087	0.102
O	7.10	7.40	0.280	0.291
P2	3.45	3.75	0.136	0.148
L	19.00	21.00	0.748	0.827
L1	4.20	4.50	0.165	0.177
b	1.00	1.40	0.039	0.055
b1	1.80	2.25	0.071	0.089
e	10.65	10.95	0.419	0.431
D	20.95	21.35	0.825	0.841
Y1	7.60	8.10	0.299	0.319
Y2	11.00	13.00	0.433	0.512
Y3	1.75	2.25	0.069	0.089
Y4	16.00	16.40	0.630	0.646
E2	4.60	4.90	0.181	0.193
T	1.35REF		0.053REF	
H	16.25REF		0.640REF	
E1	14.00REF		0.551REF	
B	6.55REF		0.258REF	