

MELF Glass-Encapsulate Diodes

Zener Diodes

Features


- P_d 1.0W
- V_Z 3.0V-75V
- Range 5%

Applications

- Stabilizing Voltage

Mechanical Data

- Case: JEDEC MELF/LL-41 molded glass body
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode end

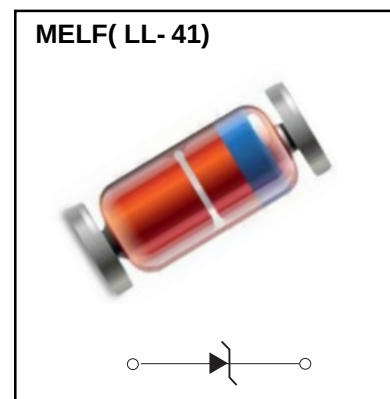

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	Max
Power dissipation	P_d	W	$T_L=75^{\circ}\text{C}$	1.0
Zener current	I_Z	mA		P_V / V_Z
Maximum junction temperature	T_j	$^{\circ}\text{C}$		-65 to +175
Storage temperature range	T_{stg}	$^{\circ}\text{C}$		-65 to +175

Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Max
Thermal resistance	$R_{\theta JA}$	$^{\circ}\text{C}/\text{W}$	Between junction and ambient	170
Forward voltage	V_F	V	$I_F=200\text{mA}$	1.2

Electrical Characteristics (T_A=25°C unless otherwise noted)

Type	Zener Voltage ³⁾		Dynamic Resistance ¹⁾			Reverse Current		Maximum Surge Current ⁴⁾	Maximum Regulator Current ²⁾
	V _{Znom}	at I _{ZT}	Z _{ZT}	Z _{ZK}	at I _{ZK}	I _R	at V _R	at T _a = 25°C	
	(V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	(V)	I _{ZSM} (mA)	I _{ZM} (mA)
ZM4727A	3	83	10	400	1	150	1	1375	275
ZM4728A	3.3	76	10	400	1	150	1	1375	275
ZM4729A	3.6	69	10	400	1	100	1	1260	252
ZM4730A	3.9	64	9	400	1	100	1	1190	234
ZM4731A	4.3	58	9	400	1	50	1	1070	217
ZM4732A	4.7	53	8	500	1	10	1	970	193
ZM4733A	5.1	49	7	550	1	10	1	890	178
ZM4734A	5.6	45	5	600	1	10	2	810	162
ZM4735A	6.2	41	2	700	1	10	3	730	146
ZM4736A	6.8	37	3.5	700	1	10	4	660	133
ZM4737A	7.5	34	4	700	0.5	10	5	605	121
ZM4738A	8.2	31	4.5	700	0.5	10	6	550	110
ZM4739A	9.1	28	5	700	0.5	10	7	500	100
ZM4740A	10	25	7	700	0.25	10	7.6	454	91
ZM4741A	11	23	8	700	0.25	5	8.4	414	83
ZM4742A	12	21	9	700	0.25	5	9.1	380	76
ZM4743A	13	19	10	700	0.25	5	9.9	344	69
ZM4744A	15	17	14	700	0.25	5	11.4	304	61
ZM4745A	16	15.5	16	700	0.25	5	12.2	285	57
ZM4746A	18	14	20	750	0.25	5	13.7	250	50
ZM4747A	20	12.5	22	750	0.25	5	15.2	225	45
ZM4748A	22	11.5	23	750	0.25	5	16.7	205	41
ZM4749A	24	10.5	25	750	0.25	5	18.2	190	38
ZM4750A	27	9.5	35	750	0.25	5	20.6	170	34
ZM4751A	30	8.5	40	1000	0.25	5	22.8	150	30
ZM4752A	33	7.5	45	1000	0.25	5	25.1	135	27
ZM4753A	36	7	50	1000	0.25	5	27.4	125	25
ZM4754A	39	6.5	60	1000	0.25	5	29.7	115	23
ZM4755A	43	6	70	1500	0.25	5	32.7	110	22
ZM4756A	47	5.5	80	1500	0.25	5	35.8	95	19
ZM4757A	51	5	95	1500	0.25	5	38.8	90	18
ZM4758A	56	4.5	110	2000	0.25	5	42.6	80	16
ZM4759A	62	4	125	2000	0.25	5	47.1	70	14
ZM4760A	68	3.7	150	2000	0.25	5	51.7	65	13
ZM4761A	75	3.3	175	2000	0.25	5	56	60	12

¹⁾ The dynamic resistance is derived from the 60 Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener Current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}. Dynamic resistance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.



²⁾ Valid provided that electrodes are kept at ambient temperature.

³⁾ Tested with pulses t_p = 20 ms.


⁴⁾ The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current I_{ZT}.

Breakdown characteristics


$T_J = \text{constant (pulsed)}$

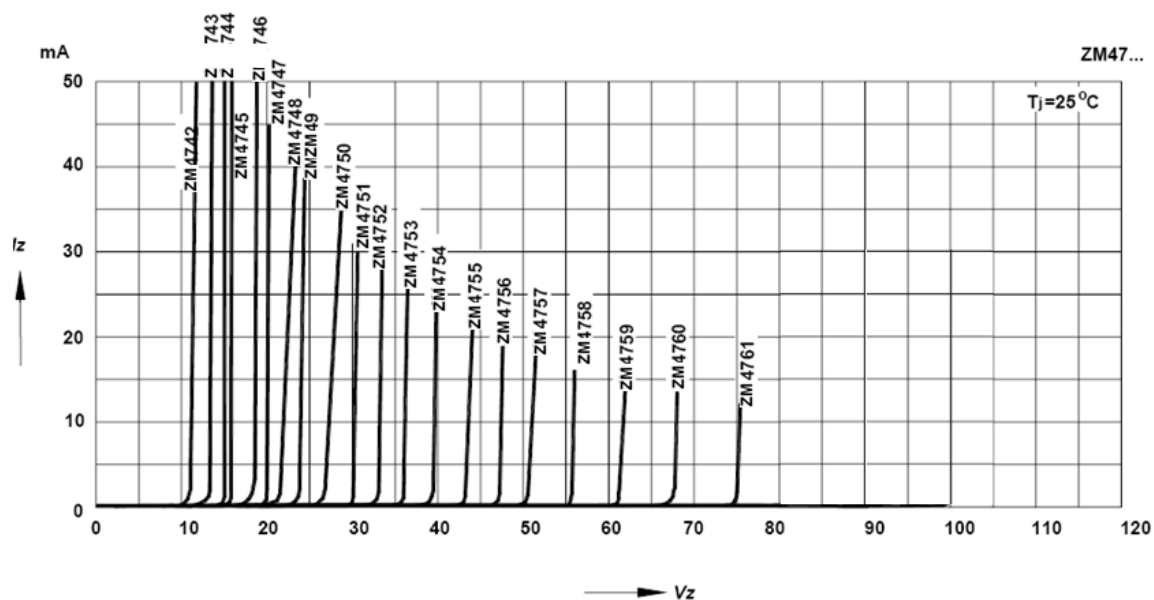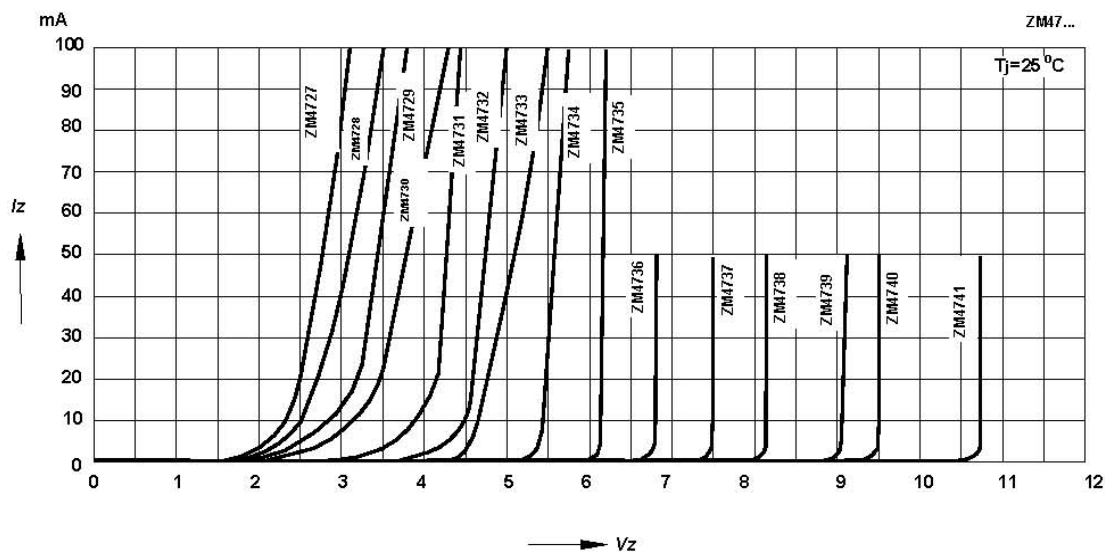

Power Dissipation vs Ambient Temperature

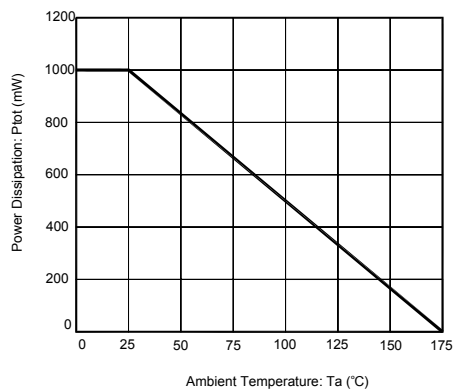


MELF(LL- 41) Package Outline Dimensions

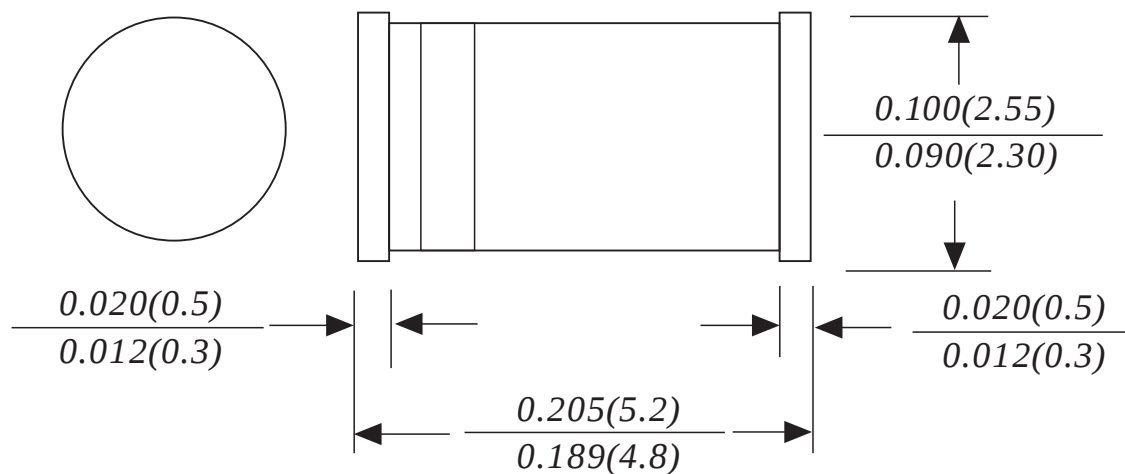

Dimensions in millimeters

MELF(LL- 41) Suggested Pad Layout

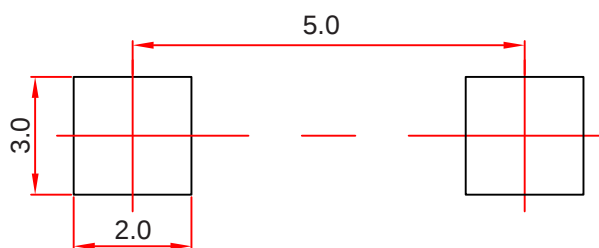

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

NOTICE

JSHD reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSHD does not assume any liability arising out of the application or use of any product described herein.