

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Surface-mounted package
- ☒ Advanced trench cell design



1.2 Applications

- ☒ Motor appliances
- ☒ High power inverter system

1.3 Quick reference

- ☒ $BV \geq 30\text{ V}$
- ☒ $R_{DS(ON)} \leq 6.3\text{ m}\Omega @ V_{GS} = 10\text{ V}$
- ☒ $P_{tot} \leq 35\text{ W}$
- ☒ $R_{DS(ON)} \leq 8.2\text{ m}\Omega @ V_{GS} = 4.5\text{ V}$
- ☒ $I_D \leq 50\text{ A}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
4	Gate(G)	 Top View PDFN3.3x3.3-8L	
5,6,7,8	Drain(D)		
1,2,3	Source(S)		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V _{DS}	Drain-Source Voltage	T _A = 25 °C	30	-	V
V _{GS}	Gate-Source Voltage	T _A = 25 °C	-	± 20	V
I _D *	Drain Current	T _A = 25 °C, V _{GS} = 10 V	-	50	A
		T _A = 100 °C, V _{GS} = 10 V	-	30	A
I _{DM} *,**	Pulsed Drain Current	T _A = 25 °C, V _{GS} = 10 V	-	50	A
P _{tot}	Total Power Dissipation	T _A = 25 °C	-	35	W
T _{stg}	Storage Temperature		- 55	150	°C
T _J	Junction Temperature		- 55	150	°C
I _S	Diode Forward Current	T _A = 25 °C	-	50	A
R _{θJA} *	Thermal Resistance- Junction to Ambient		-	62.5	°C / W

Notes :

* Surface Mounted on 1 in² pad area, t ≤ 10 sec

** Pulse width ≤ 300 μs, duty cycle ≤ 2 %

4. Marking Information

Product Name	Marking
N0603Q	0603 YWWXXX YWWXXX : Date Code

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
N0603Q	PDFN3.3*3.3			5000	

Note: JSHD defines “Green” as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C)

6. Electrical Characteristics ($T_A=25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted)





Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _{DS} = 250 μA	30	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = 250 μA	1.0	-	2.0	V
I _{DSS}	Drain Leakage Current	V _{DS} = 24V, V _{GS} = 0 V	-	-	1	μA
		T _J = 85 °C	-	-	30	μA
I _{GSS}	Gate Leakage Current	V _{GS} = ±20 V, V _{DS} = 0 V	-	-	± 100	nA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} = 10 V, I _{DS} = 10 A	-	5.7	6.3	m Ω
		V _{GS} = 4.5V, I _{DS} = 5 A	-	7.5	8.2	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} = 10 A, V _{GS} = 0V	-	-	1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} = 10 A, V _{GS} = 0 V di _{SD} /dt = 100 A/μs	-	34	-	ns
Q _{rr}	Reverse Recovery Charge		-	7.1	-	μC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 15 V Frequency = 1 MHz	-	1145	-	pF
C _{oss}	Output Capacitance		-	106	-	
C _{rss}	Reverse Transfer Capacitance		-	87	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} = 15V, V _{GEN} = 10 V, R _G = 4.5 Ω, R _L = 1.5 Ω, I _{DS} = 10 A	-	7	-	ns
t _r	Turn-on Rise Time		-	30	-	
t _{d(off)}	Turn-off Delay Time		-	19	-	
t _f	Turn-off Fall Time		-	18	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{GS} = 15 V, V _{DS} = 10 V, I _{DS} = 10 A	-	22	-	nC
Q _{gs}	Gate-Source Charge		-	5	-	
Q _{gd}	Gate-Drain Charge		-	3.3	-	

Notes :





a : Pulse test ; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$

b : Guaranteed by design, not subject to production testing





7. Typical Characteristics

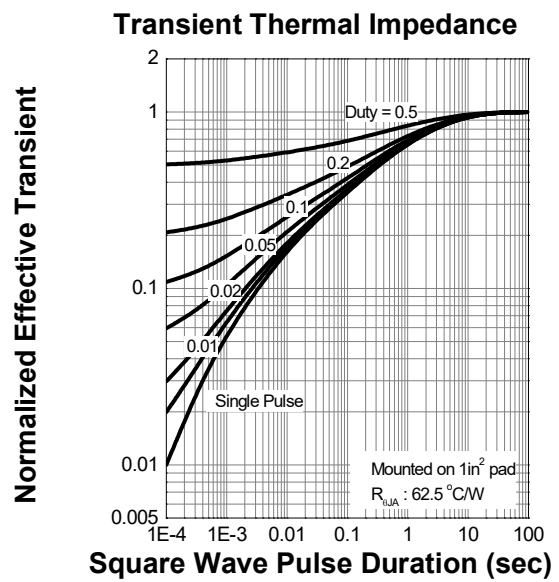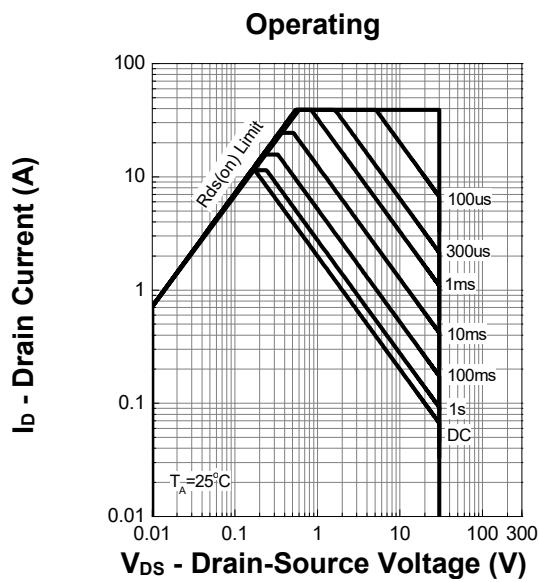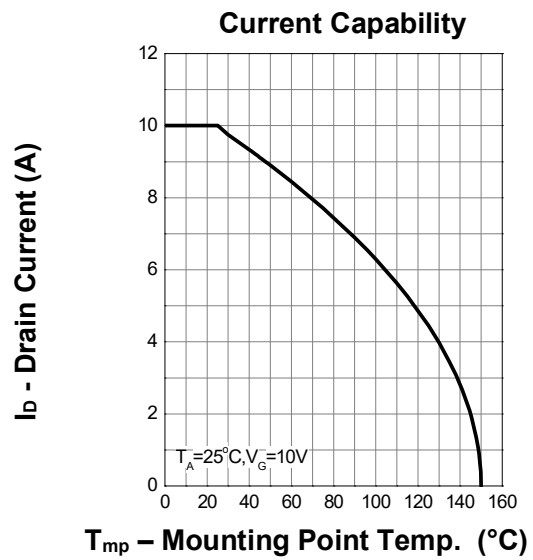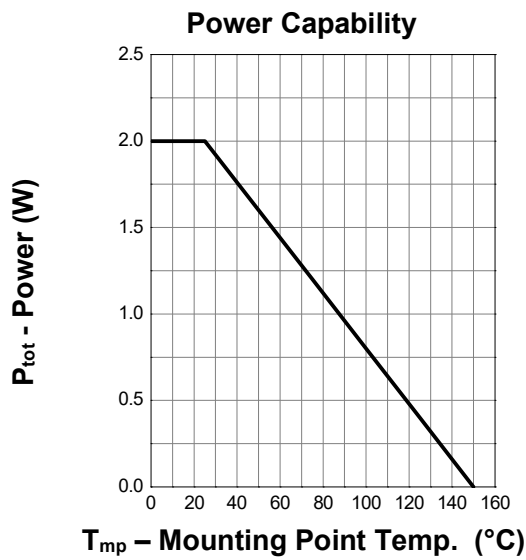

7. Typical Characteristics (cont.)

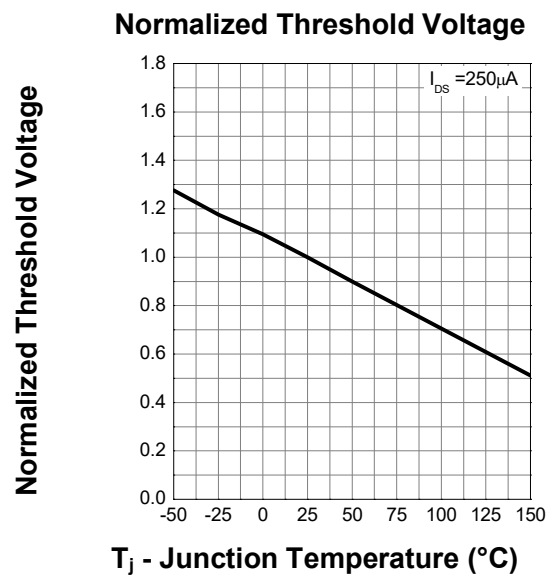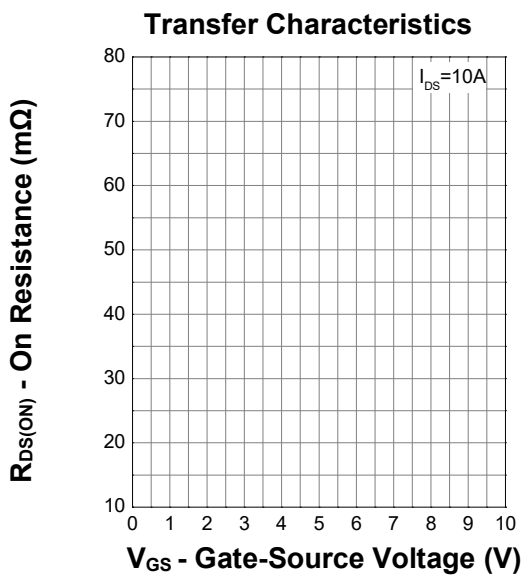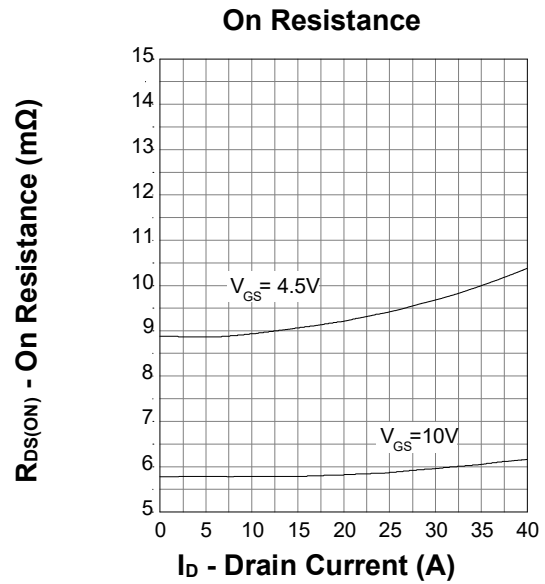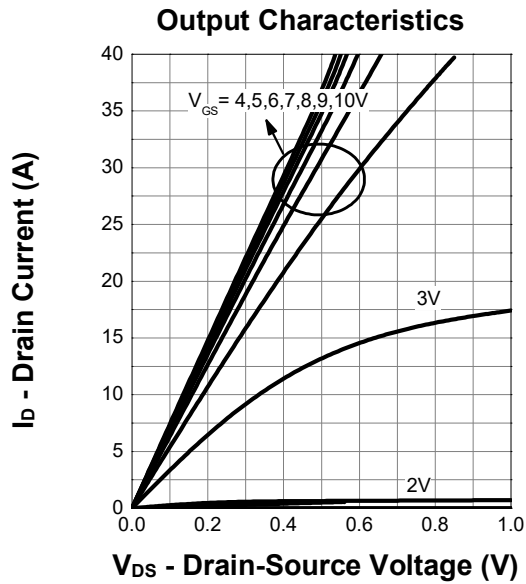


7. Typical Characteristics (cont.)

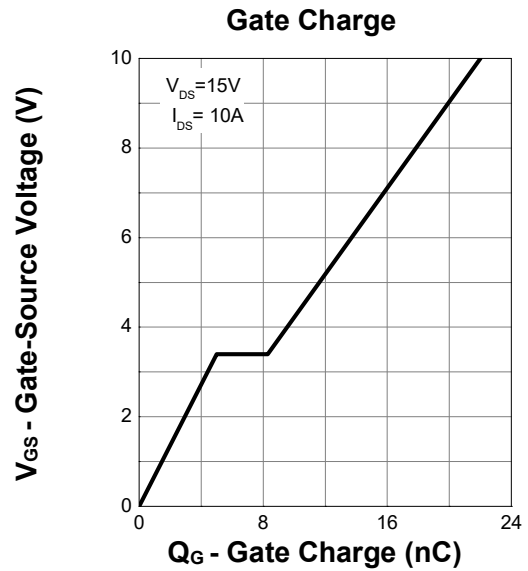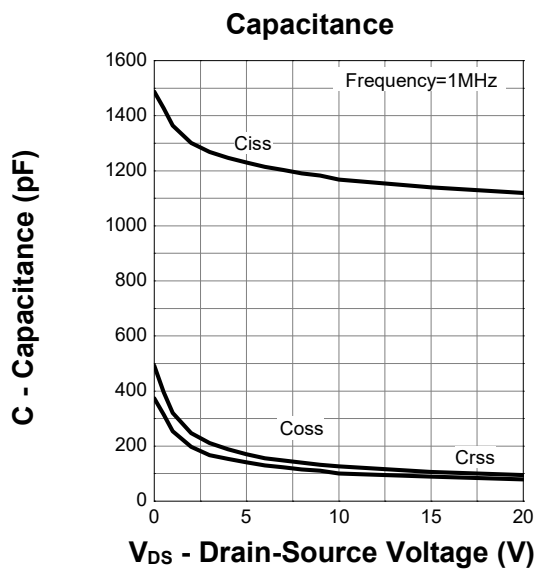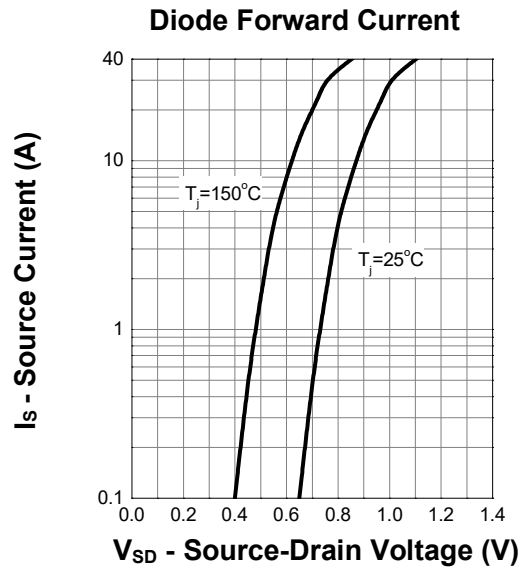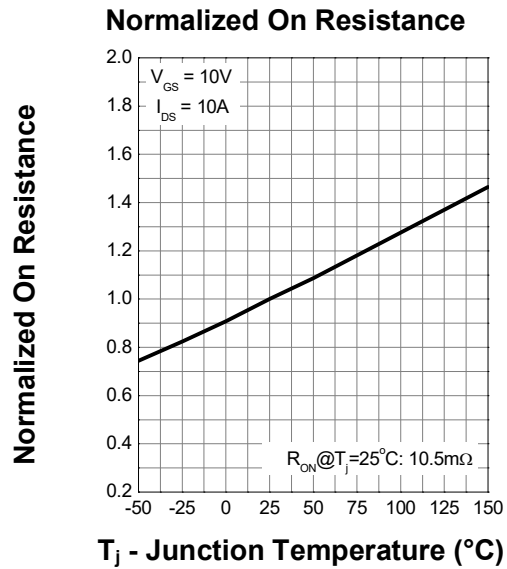

8. Package Dimensions

PDFN3.3*3.3

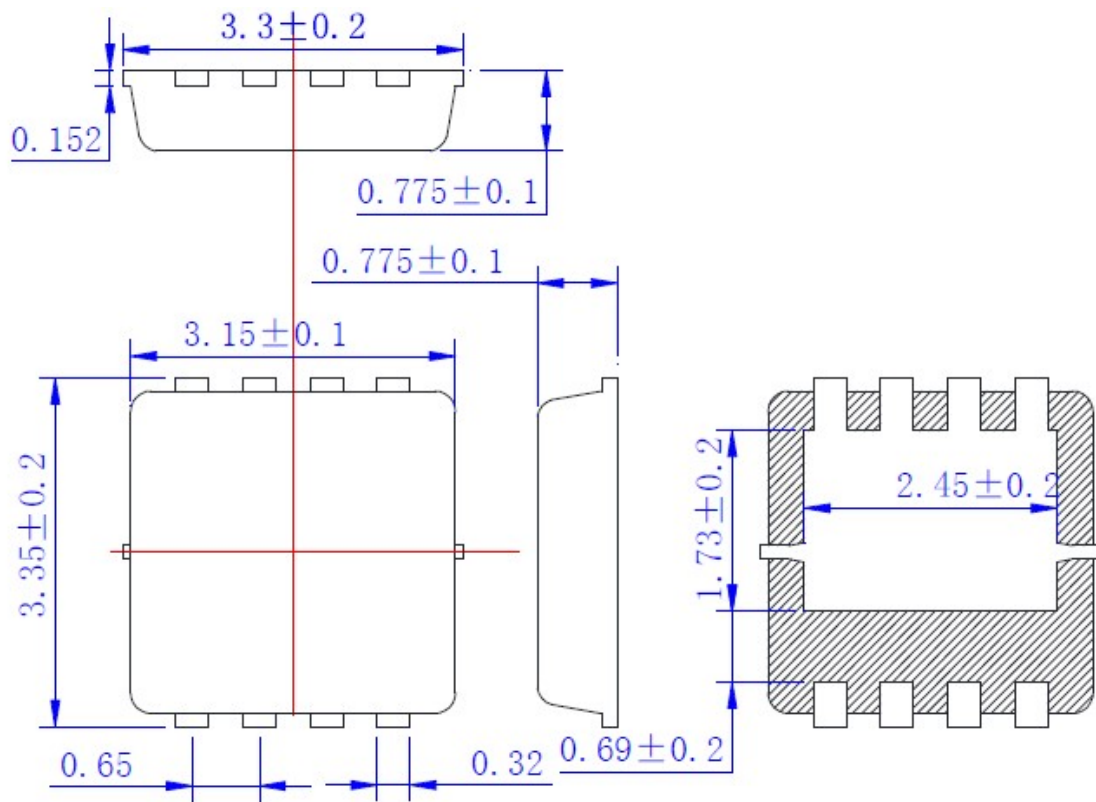

NOTICE

JSHD reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSHD does not assume any liability arising out of the application or use of any product described herein.