


## SOT-23 Plastic-Encapsulate Diodes

ZENER DIODE

### Features

- Planar Die Construction
- 300mW Power Dissipation
- Zener Voltages from 2.4V - 43V
- Ultra-Small Surface Mount Package Power Dissipation

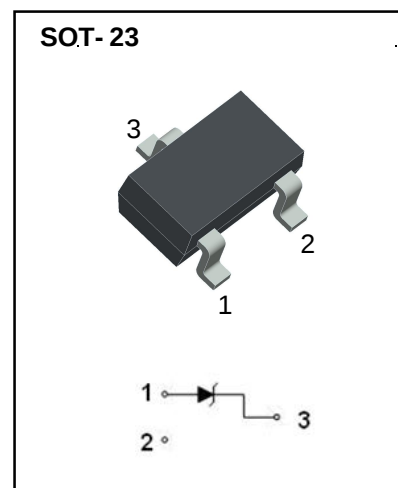

### Maximum Ratings( $T_a=25^{\circ}\text{C}$ unless otherwise specified)

| Characteristic                                 | Symbol          | Value    | Unit                 |
|------------------------------------------------|-----------------|----------|----------------------|
| Forward Voltage (Note 2) @ $I_F = 10\text{mA}$ | $V_F$           | 0.9      | V                    |
| Power Dissipation(Note 1)                      | $P_d$           | 300      | mW                   |
| Thermal Resistance from Junction to Ambient    | $R_{\theta JA}$ | 417      | $^{\circ}\text{C/W}$ |
| Junction Temperature                           | $T_j$           | 150      | $^{\circ}\text{C}$   |
| Storage Temperature Range                      | $T_{stg}$       | -55~+150 | $^{\circ}\text{C}$   |

## Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ unless otherwise noted)








| Type Number | Code | Zener Voltage Range (Note 2) |        |        |          | Maximum Zener Impedance (Note 3) |                 |          | Maximum Reverse Current |       | Temperature Coefficient of Zener voltage @ $I_{ZT}=5\text{mA}$ |      |
|-------------|------|------------------------------|--------|--------|----------|----------------------------------|-----------------|----------|-------------------------|-------|----------------------------------------------------------------|------|
|             |      | $V_Z@I_{ZT}$                 |        |        | $I_{ZT}$ | $Z_{ZT}@I_{ZT}$                  | $Z_{ZK}@I_{ZK}$ | $I_{ZK}$ | $I_R$                   | $V_R$ | mV/ $^{\circ}\text{C}$                                         |      |
|             |      | Nom(V)                       | Min(V) | Max(V) | (mA)     | $(\Omega)$                       |                 | (mA)     | ( $\mu\text{A}$ )       | (V)   | Min                                                            | Max  |
| BZX84C2V4   | Z11  | 2.4                          | 2.20   | 2.60   | 5        | 100                              | 600             | 1.0      | 50                      | 1.0   | -3.5                                                           | 0    |
| BZX84C2V7   | Z12  | 2.7                          | 2.5    | 2.9    | 5        | 100                              | 600             | 1.0      | 20                      | 1.0   | -3.5                                                           | 0    |
| BZX84C3V0   | Z13  | 3.0                          | 2.8    | 3.2    | 5        | 95                               | 600             | 1.0      | 10                      | 1.0   | -3.5                                                           | 0    |
| BZX84C3V3   | Z14  | 3.3                          | 3.1    | 3.5    | 5        | 95                               | 600             | 1.0      | 5                       | 1.0   | -3.5                                                           | 0    |
| BZX84C3V6   | Z15  | 3.6                          | 3.4    | 3.8    | 5        | 90                               | 600             | 1.0      | 5                       | 1.0   | -3.5                                                           | 0    |
| BZX84C3V9   | Z16  | 3.9                          | 3.7    | 4.1    | 5        | 90                               | 600             | 1.0      | 3                       | 1.0   | -3.5                                                           | 0    |
| BZX84C4V3   | Z17  | 4.3                          | 4.0    | 4.6    | 5        | 90                               | 600             | 1.0      | 3                       | 1.0   | -3.5                                                           | 0    |
| BZX84C4V7   | Z1   | 4.7                          | 4.4    | 5.0    | 5        | 80                               | 500             | 1.0      | 3                       | 2.0   | -3.5                                                           | 0.2  |
| BZX84C5V1   | Z2   | 5.1                          | 4.8    | 5.4    | 5        | 60                               | 480             | 1.0      | 2                       | 2.0   | -2.7                                                           | 1.2  |
| BZX84C5V6   | Z3   | 5.6                          | 5.2    | 6.0    | 5        | 40                               | 400             | 1.0      | 1                       | 2.0   | -2.0                                                           | 2.5  |
| BZX84C6V2   | Z4   | 6.2                          | 5.8    | 6.6    | 5        | 10                               | 150             | 1.0      | 3                       | 4.0   | 0.4                                                            | 3.7  |
| BZX84C6V8   | Z5   | 6.8                          | 6.4    | 7.2    | 5        | 15                               | 80              | 1.0      | 2                       | 4.0   | 1.2                                                            | 4.5  |
| BZX84C7V5   | Z6   | 7.5                          | 7.0    | 7.9    | 5        | 15                               | 80              | 1.0      | 1                       | 5.0   | 2.5                                                            | 5.3  |
| BZX84C8V2   | Z7   | 8.2                          | 7.7    | 8.7    | 5        | 15                               | 80              | 1.0      | 0.7                     | 5.0   | 3.2                                                            | 6.2  |
| BZX84C9V1   | Z8   | 9.1                          | 8.5    | 9.6    | 5        | 15                               | 100             | 1.0      | 0.5                     | 6.0   | 3.8                                                            | 7.0  |
| BZX84C10    | Z9   | 10                           | 9.4    | 10.6   | 5        | 20                               | 150             | 1.0      | 0.2                     | 7.0   | 4.5                                                            | 8.0  |
| BZX84C11    | Y1   | 11                           | 10.4   | 11.6   | 5        | 20                               | 150             | 1.0      | 0.1                     | 8.0   | 5.4                                                            | 9.0  |
| BZX84C12    | Y2   | 12                           | 11.4   | 12.7   | 5        | 25                               | 150             | 1.0      | 0.1                     | 8.0   | 6.0                                                            | 10.0 |
| BZX84C13    | Y3   | 13                           | 12.4   | 14.1   | 5        | 30                               | 170             | 1.0      | 0.1                     | 8.0   | 7.0                                                            | 11.0 |
| BZX84C15    | Y4   | 15                           | 13.8   | 15.6   | 5        | 30                               | 200             | 1.0      | 0.1                     | 10.5  | 9.2                                                            | 13.0 |
| BZX84C16    | Y5   | 16                           | 15.3   | 17.1   | 5        | 40                               | 200             | 1.0      | 0.1                     | 11.2  | 10.4                                                           | 14.0 |
| BZX84C18    | Y6   | 18                           | 16.8   | 19.1   | 5        | 45                               | 225             | 1.0      | 0.1                     | 12.6  | 12.4                                                           | 16.0 |
| BZX84C20    | Y7   | 20                           | 18.8   | 21.2   | 5        | 55                               | 225             | 1.0      | 0.1                     | 14.0  | 14.4                                                           | 18.0 |
| BZX84C22    | Y8   | 22                           | 20.8   | 23.3   | 5        | 55                               | 250             | 1.0      | 0.1                     | 15.4  | 16.4                                                           | 20.0 |
| BZX84C24    | Y9   | 24                           | 22.8   | 25.6   | 5        | 70                               | 250             | 1.0      | 0.1                     | 16.8  | 18.4                                                           | 22.0 |
| BZX84C27    | Y10  | 27                           | 25.1   | 28.9   | 2        | 80                               | 300             | 0.5      | 0.1                     | 18.9  | 21.4                                                           | 25.3 |
| BZX84C30    | Y11  | 30                           | 28.0   | 32.0   | 2        | 80                               | 300             | 0.5      | 0.1                     | 21.0  | 24.4                                                           | 29.4 |
| BZX84C33    | Y12  | 33                           | 31.0   | 35.0   | 2        | 80                               | 325             | 0.5      | 0.1                     | 23.1  | 27.4                                                           | 33.4 |
| BZX84C36    | Y13  | 36                           | 34.0   | 38.0   | 2        | 90                               | 350             | 0.5      | 0.1                     | 25.2  | 30.4                                                           | 37.4 |
| BZX84C39    | Y14  | 39                           | 37.0   | 41.0   | 2        | 130                              | 350             | 0.5      | 0.1                     | 27.3  | 33.4                                                           | 41.2 |
| BZX84C43    | Y15  | 43                           | 40.0   | 46.0   | 2        | 100                              | 700             | 1        | 0.1                     | 32    | 10                                                             | 12   |

Notes: 1. Valid provided that device terminals are kept at ambient temperature.


2. Tested with pulses, period=5ms,pulse width =300 $\mu\text{s}$ .

3.  $f = 1\text{kHz}$ .

## Typical Characteristics

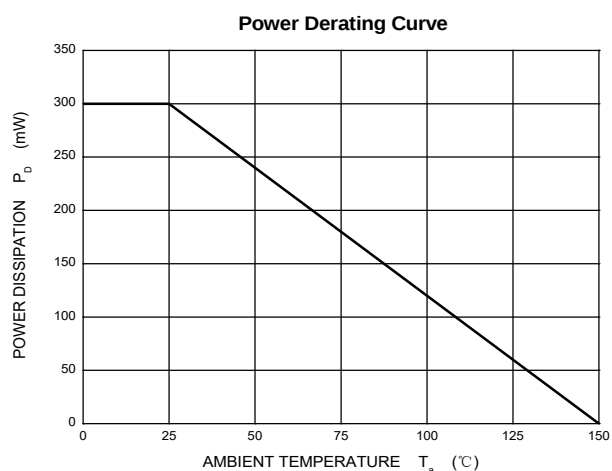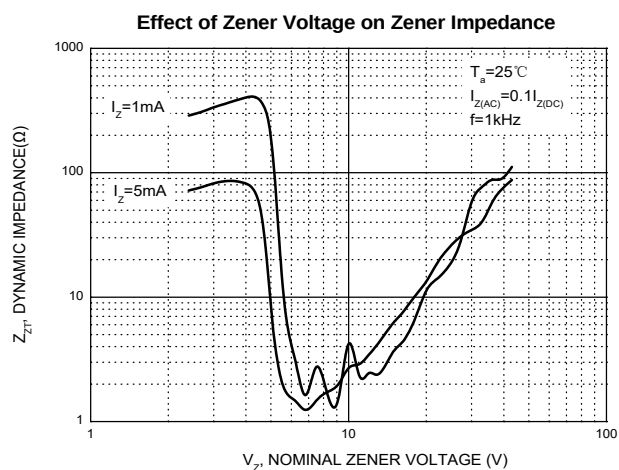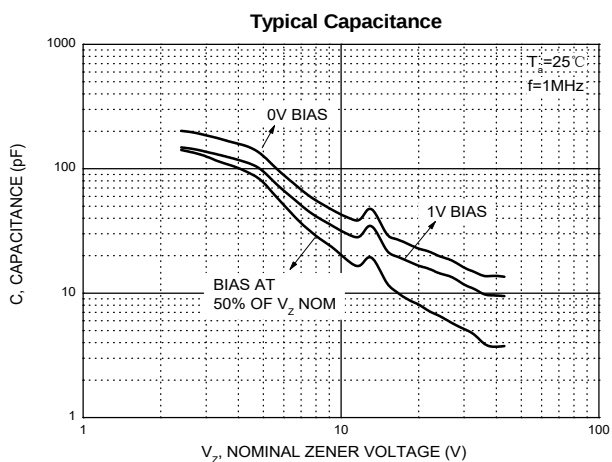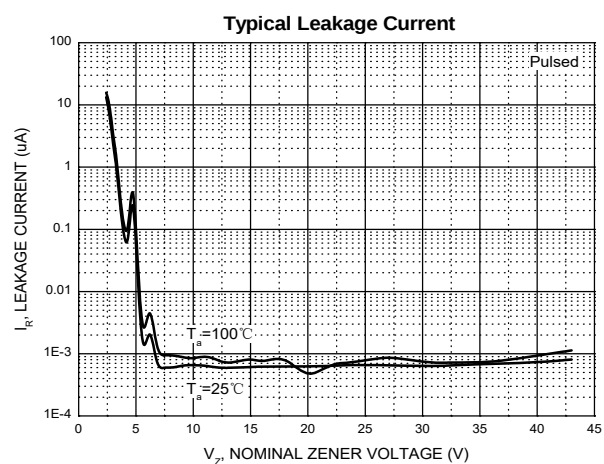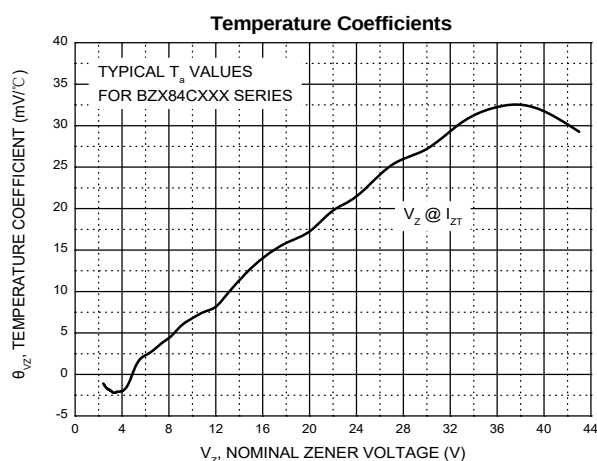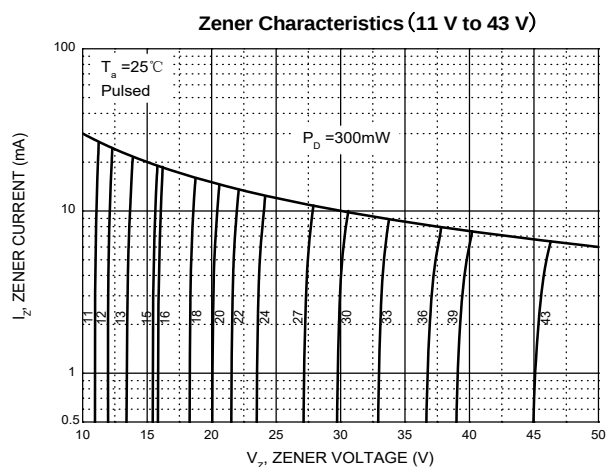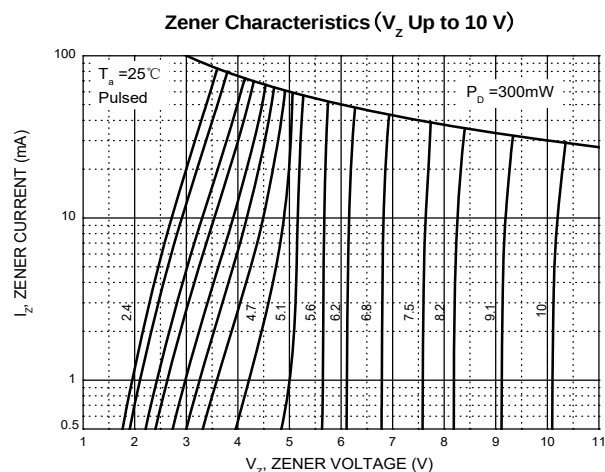


## SOT-23 Package Outline Dimensions

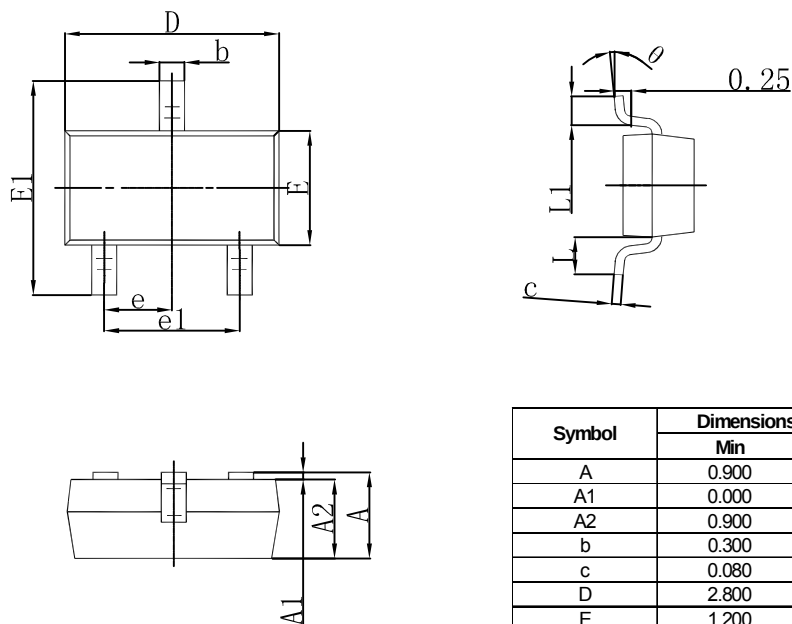

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.900                     | 1.150 | 0.035                | 0.045 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 0.900                     | 1.050 | 0.035                | 0.041 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.080                     | 0.150 | 0.003                | 0.006 |
| D      | 2.800                     | 3.000 | 0.110                | 0.118 |
| E      | 1.200                     | 1.400 | 0.047                | 0.055 |
| E1     | 2.250                     | 2.550 | 0.089                | 0.100 |
| e      | 0.950 TYP                 |       | 0.037 TYP            |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.550 REF                 |       | 0.022 REF            |       |
| L1     | 0.300                     | 0.500 | 0.012                | 0.020 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## SOT-23 Suggested Pad Layout



### Note:


1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

### NOTICE

JSJD reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSJD does not assume any liability arising out of the application or use of any product described herein.

Reel Taping Specifications For Surface Mount Devices-SOT-23

SOT-23 Embossed Carrier Tape

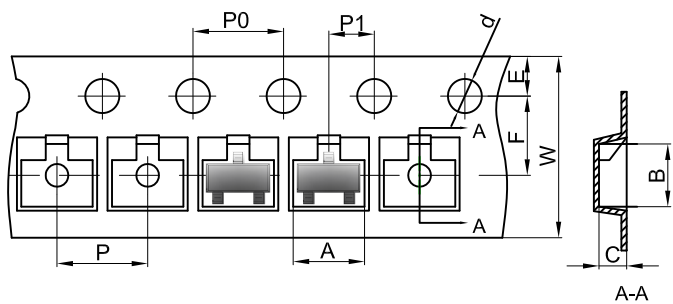


Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter |      |      |      |       |      |      |      |      |      |      |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type                     | A    | B    | C    | d     | E    | F    | P0   | P    | P1   | W    |
| SOT-23                       | 3.15 | 2.77 | 1.22 | Ø1.50 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

SOT-23 Tape Leader and Trailer

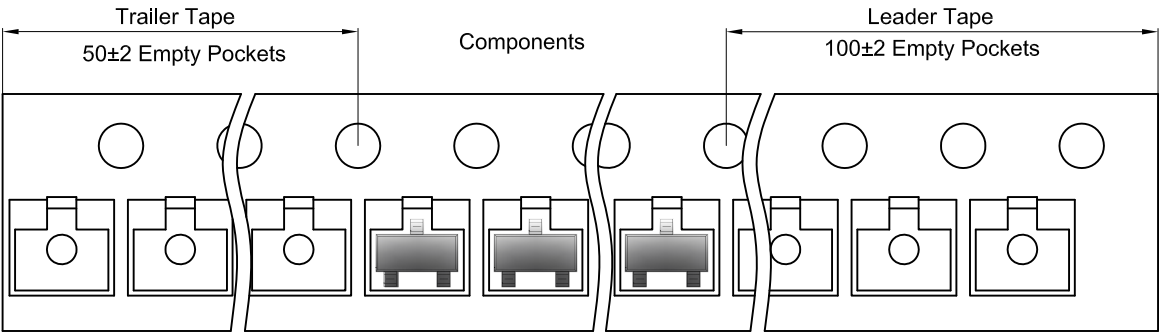

SOT-23 Reel

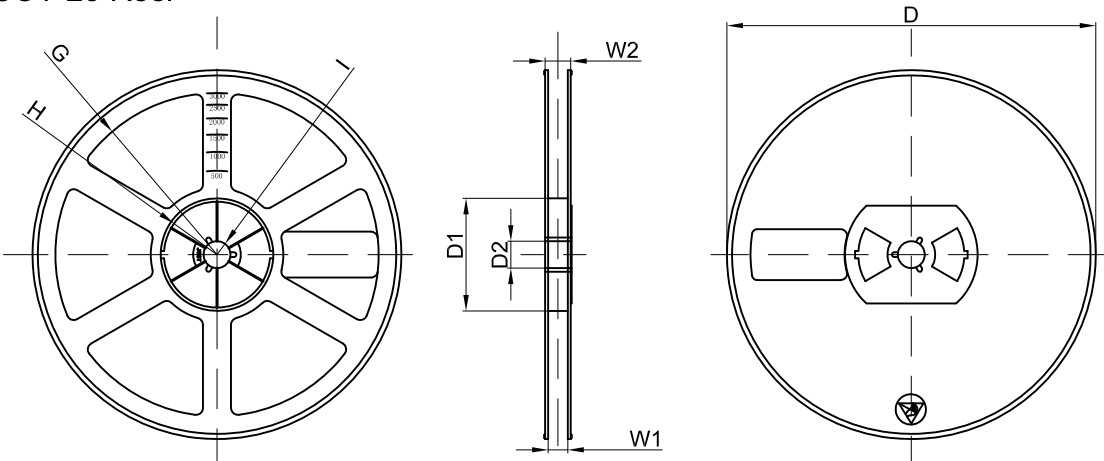

| Dimensions are in millimeter |         |       |       |        |        |       |      |       |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option                  | D       | D1    | D2    | G      | H      | I     | W1   | W2    |
| 7"Dia                        | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL     | Reel Size | Box        | Box Size(mm) | Carton      | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch    | 45,000 pcs | 203×203×195  | 180,000 pcs | 438×438×230     |          |