

TO-252-2L Plastic-Encapsulate Diodes

**HALOGEN
FREE**

SUPER FAST RECOVER RECTIFIER

MAIN CHARACTERISTICS


I_O	8 A
V_{RRM}	600 V
T_j	150 °C
$V_{F(max)}$	1.7V (@ $T_j=25^{\circ}C$)

FEATURES

- Ultrafast 35ns Recovery Times
- High Voltage Capability to 600V
- Low Reverse Leakage Current
- Typical applications are in switching power supplies, converters freewheeling diodes, and reverse battery protection.

Mechical Data

- Case: TO-252-2L
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL- STD-202, Method 208
- Polarity: Color band denotes cathode end

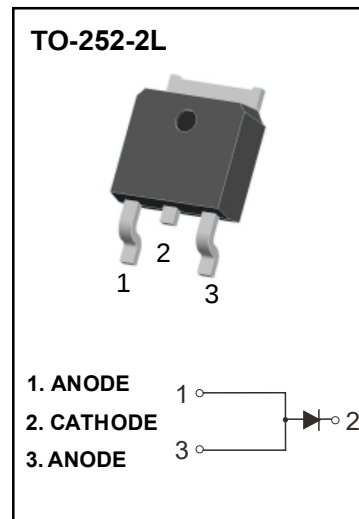

MAXIMUM RATINGS ($T_a=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	MURD860A	Unit
V_{RRM}	Peak repetitive reverse voltage	600	V
V_{RWM}	Working peak reverse voltage		
V_R	DC blocking voltage		
$V_{R(RMS)}$	RMS reverse voltage	420	V
I_O	Average rectified output current	8	A
I_{FSM}	Non-Repetitive peak forward surge current (8.3ms half sine wave)	175	A
$R_{\theta Jc}$	Thermal resistance from junction to case , $T_c=25^{\circ}C$	5.0	$^{\circ}C/W$
$R_{\theta JA}$	Thermal resistance from junction to ambient	100	$^{\circ}C/W$
T_j	Junction temperature	150	$^{\circ}C$
T_{stg}	Storage temperature	-55~+150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=100\mu A$	600			V
Reverse current	I_R	$V_R=600V$	$T_j = 25^{\circ}C$		1	μA
			$T_j = 125^{\circ}C$		300	μA
Forward voltage	V_F	$I_F=8A$	$T_j = 25^{\circ}C$		1.7	V
Typical total capacitance	C_{tot}	$V_R=4 V, f=1MHz$		45		pF
Reverse recovery time	t_{rr}	$I_F= 0.5A, I_R=1A, I_{rr}=0.25A$			35	ns

*Pulse test: pulse width $\leq 300\mu s$, duty cycles $\leq 2.0\%$.

Typical Characteristics

FIG.1 - FORWARD CURRENT DERATING CURVE

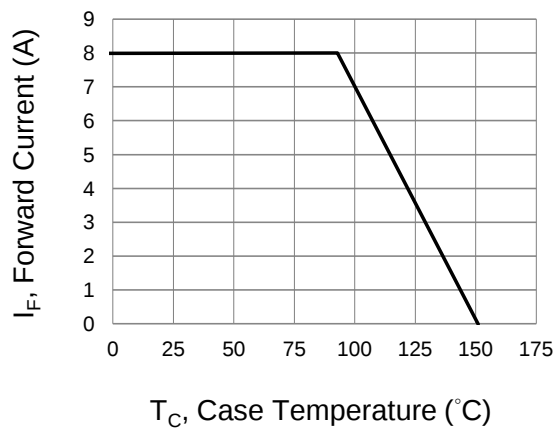


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

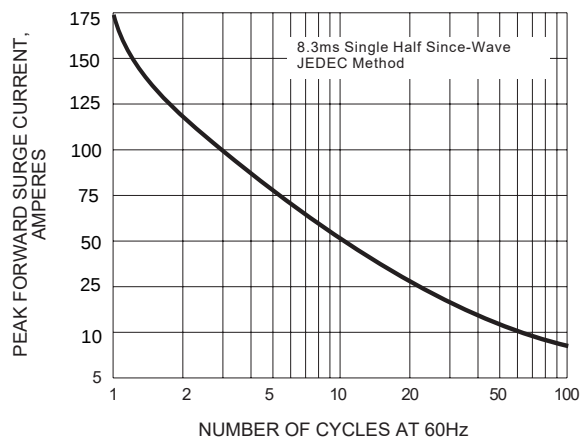


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS



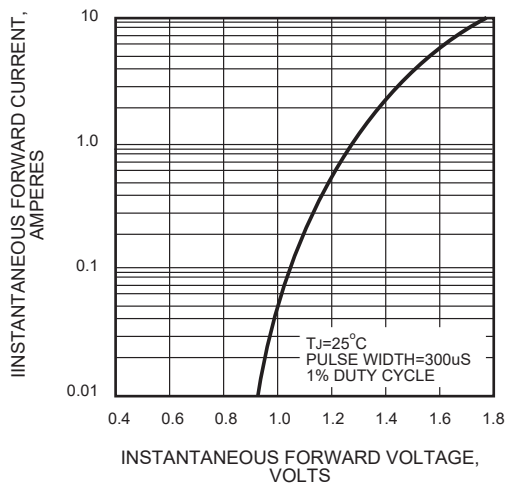


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

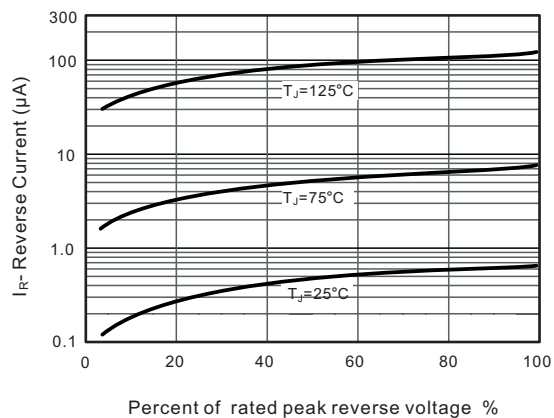


TO-252-2L Package Outline Dimensions

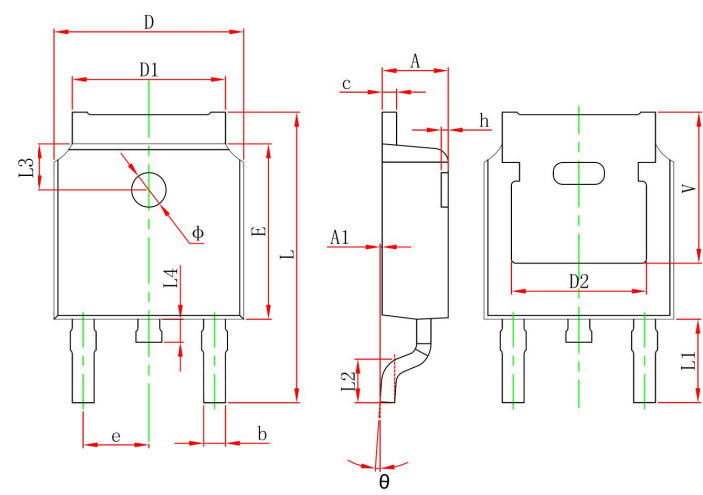

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830REF.		0.190REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900REF.		0.114REF.	
L2	1.400	1.700	0.055	0.067
L3	1.800REF.		0.071REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350REF.		0.211REF.	

TO-252-2L Suggested Pad Layout

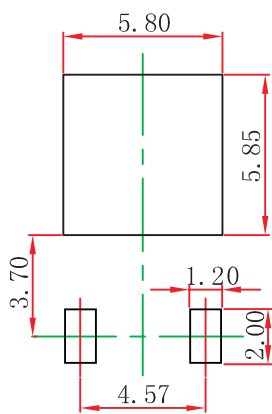


- Note:**
- 1.Controlling dimension:in millimeters.
 - 2.General tolerance:± 0.05mm.
 - 3.The pad layout is for reference purposes only.

Ordering Information

Part Number	Package	Shipping Quantity
MURD860A	TO-252-2L	2500/tape&Reel


Marking Diagram



XXXX=Date Code

TO-252-2L Tape and Reel

TO-252 Embossed Carrier Tape

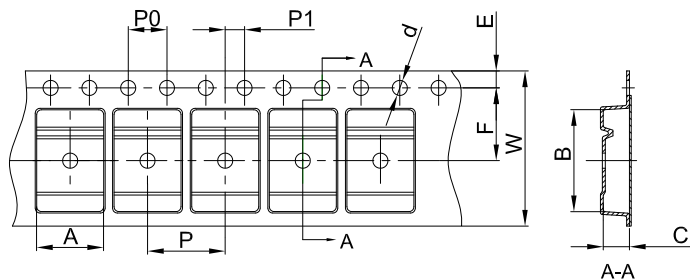


Packaging Description:


TO-252 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 25,00 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Ø1.55	1.75	7.50	4.00	8.00	2.00	16.00

TO-252 Tape Leader and Trailer

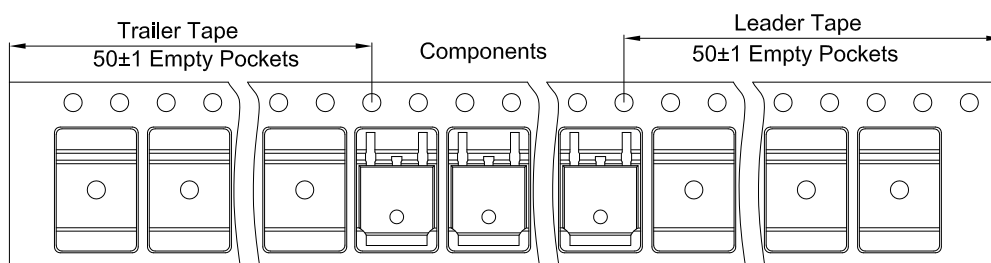

TO-252 Reel

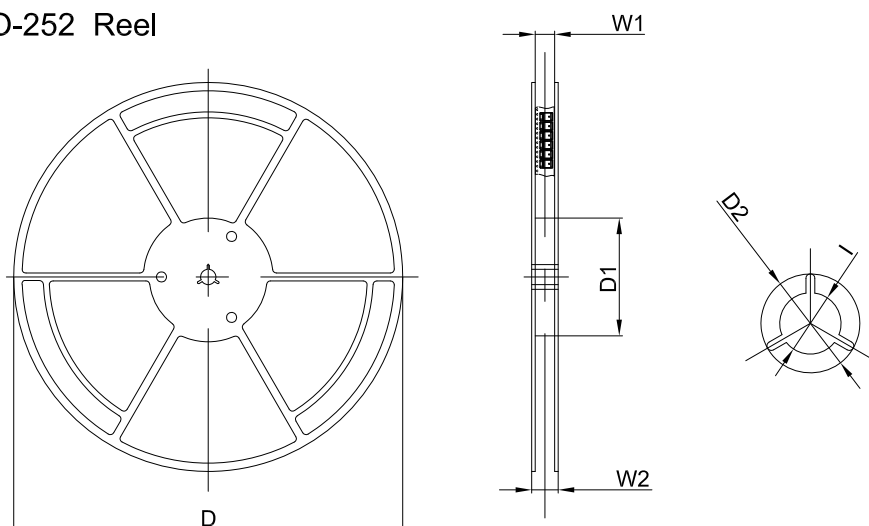

Dimensions are in millimeter						
Reel Option	D	D1	D2	W1	W2	I
13"Dia	330.00	100.00	Ø21.00	16.40	21.00	Ø13.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
2,500 pcs	13inch	2,500 pcs	340×336×29	25,000 pcs	353×346×365	