

SMAG Plastic-Encapsulate Diodes


High Efficient Rectifier

Features

- I_O 1A
- VRRM 50V-1000V
- Low forward voltage drop
- High surge current capability
- Glass passivated chip junction

Mechical Data

- Molding compound: UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL- STD-202, Method 208
- Polarity: Color band denotes cathode end

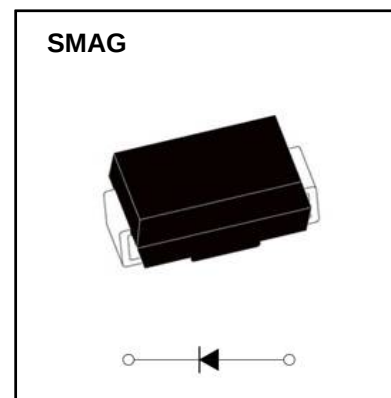

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	US							
				1A	1B	1D	1F	1G	1J	1K	1M
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	300	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V		35	70	140	210	280	420	560	700
Maximum DC blocking Voltage	V_{DC}	V		50	100	200	300	400	600	800	1000
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load, $T_L=110^{\circ}C$	1.0							
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz Half-sine wave,1 cycle, $T_a=25^{\circ}C$	30							
Junction Temperature	T_J	$^{\circ}C$		-55 ~ +150							
Storage Temperature	T_{STG}	$^{\circ}C$		-55 ~ +150							

Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition		US						
					1A	1B	1D	1F	1G	1J	1K
Peak Forward Voltage	V _{FM}	V	I _{FM} =1.0A		1.0			1.3		1.7	
Peak Reverse Current	I _{RRM1}	μA	V _{RM} =V _{RRM}	T _a =25℃	5						
	T _a =125℃			50							
Reverse Recovery time	t _r	ns	I _F =0.5A I _R =1A I _{RR} =0.25A		50				75		
Thermal Resistance(Typical)	R _{θJ-A}	℃/W	Between junction and ambient		70						
	Between junction and terminal		30								
	Between junction and case		25								
Juction Capacitance (Typical)	C _J	pF	Measured at 1.0MHz and applied reverse voltage of 4.0 volts.		15			10		7	

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE



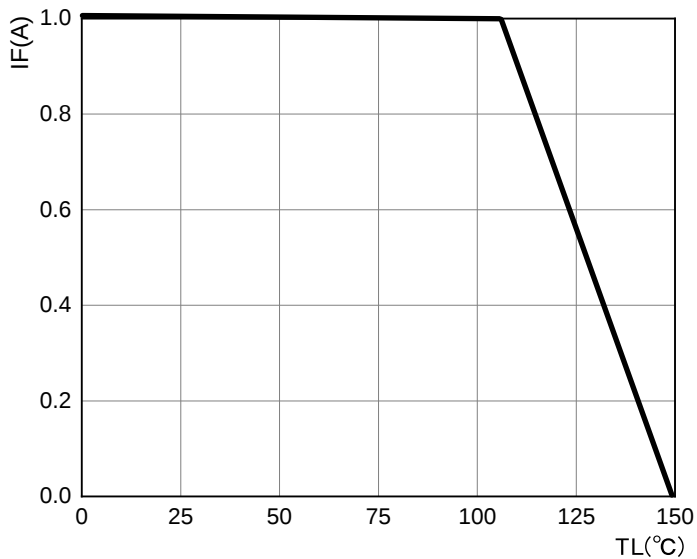


FIG 2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

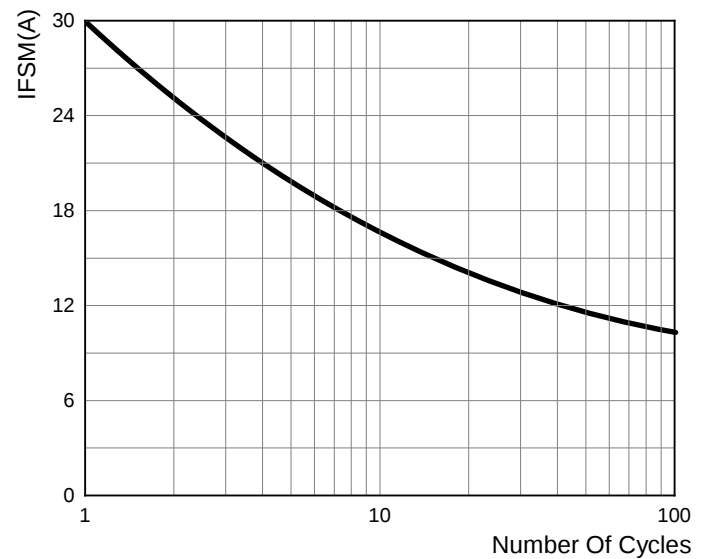


US1A-US1D

FIG.3 : TYPICAL FORWARD CHARACTERISTICS

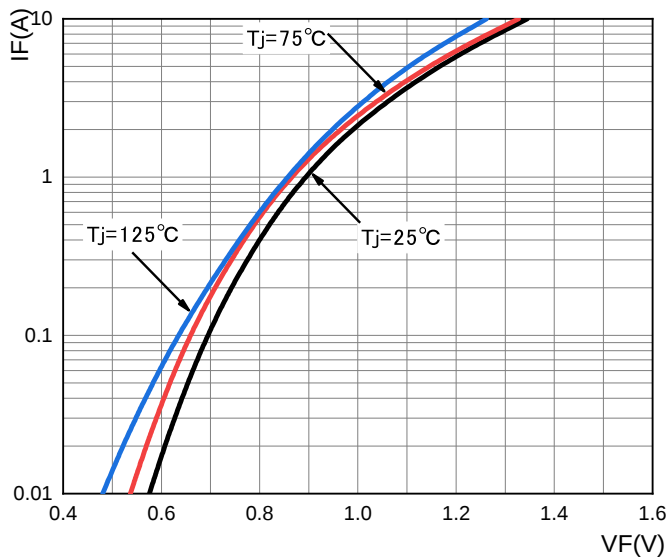

US1A-US1D


FIG.4 TYPICAL REVERSE CHARACTERISTICS

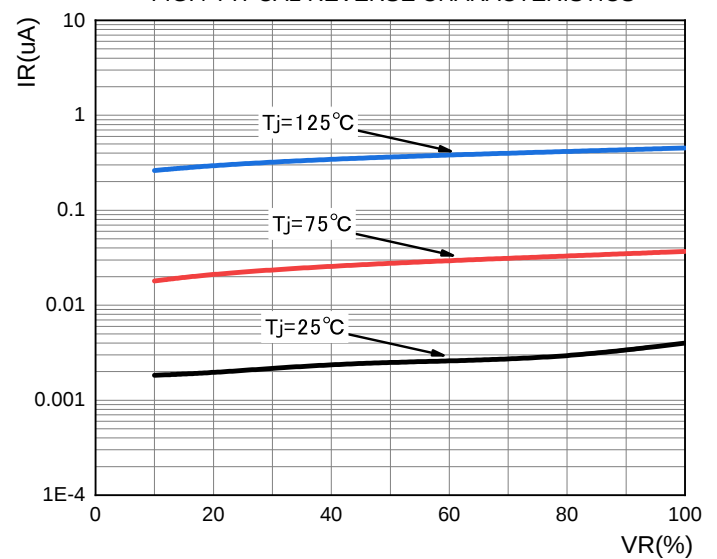

Typical Characteristics


US1G

FIG.5 : TYPICAL FORWARD CHARACTERISTICS

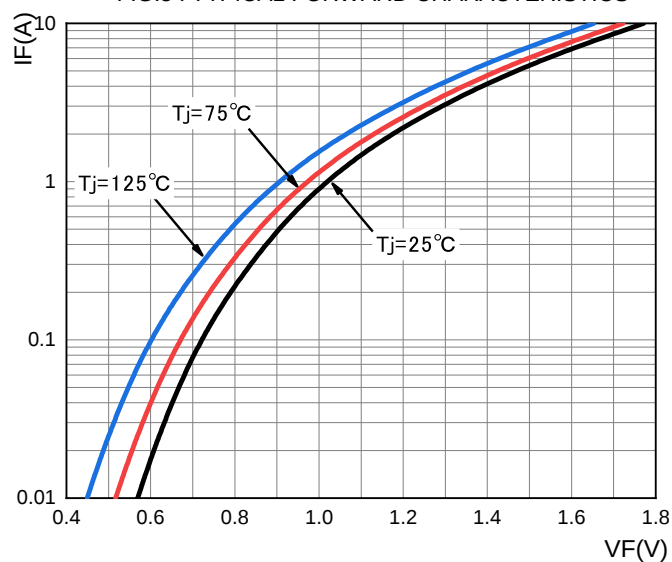


US1G

FIG.6 TYPICAL REVERSE CHARACTERISTICS

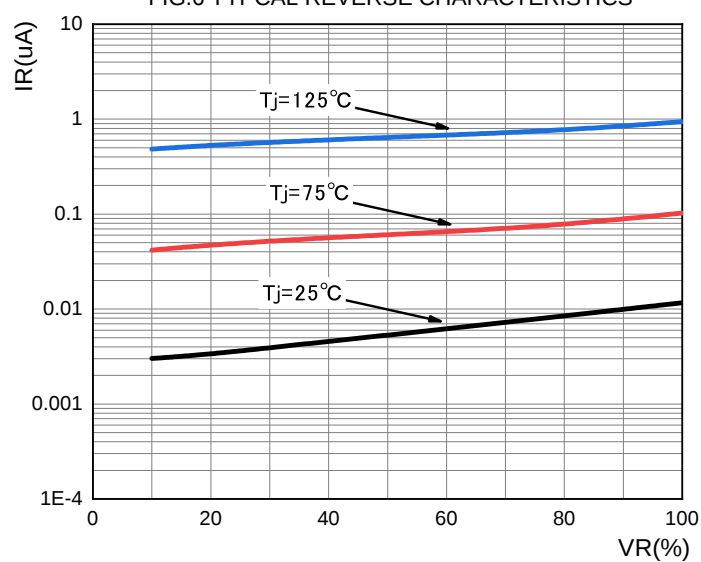


US1J-US1M

FIG.7 : TYPICAL FORWARD CHARACTERISTICS

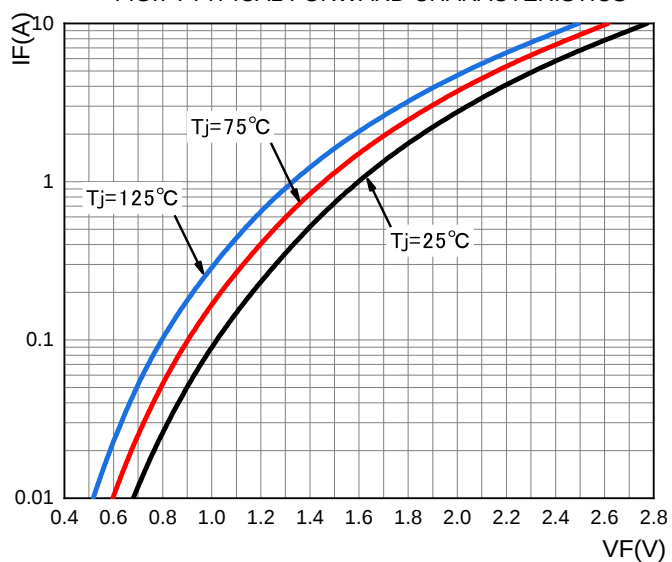


US1J-US1M

FIG.8 TYPICAL REVERSE CHARACTERISTICS

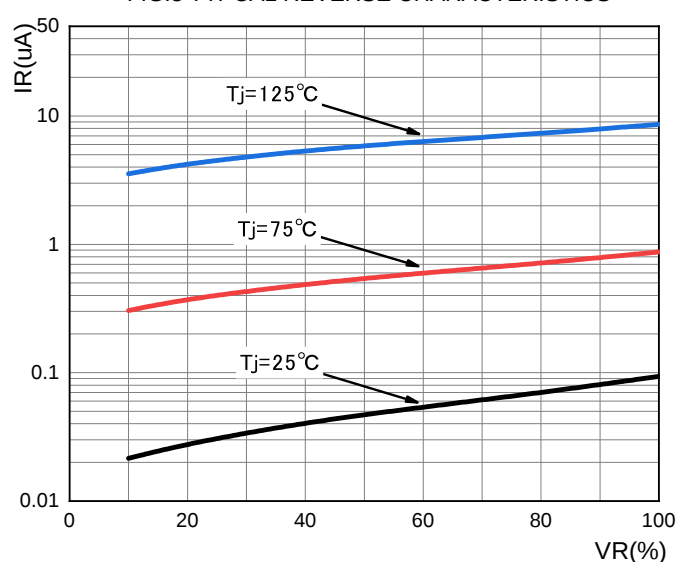


SMAG Package Outline Dimensions

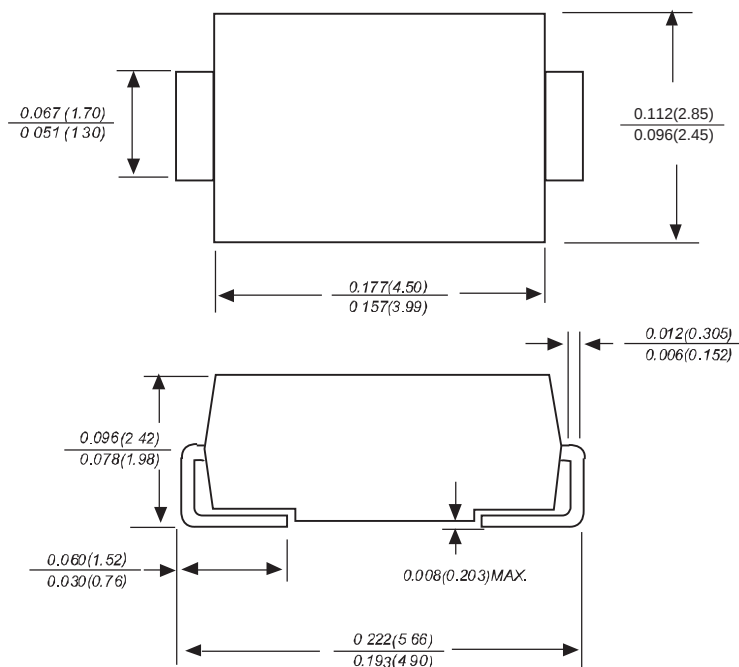

Dimensions in inches and (millimeters)

SMAG Suggested Pad Layout

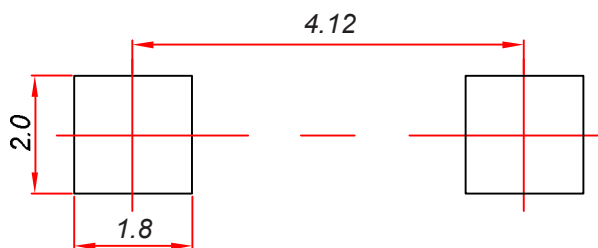

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

Ordering Information

Part Number	Package	Shipping Quantity
US1A-US1M	SMAG	5000/tape&Reel

Marking Diagram



X: From A To M

Reel Taping Specifications For Surface Mount Devices- SMAG

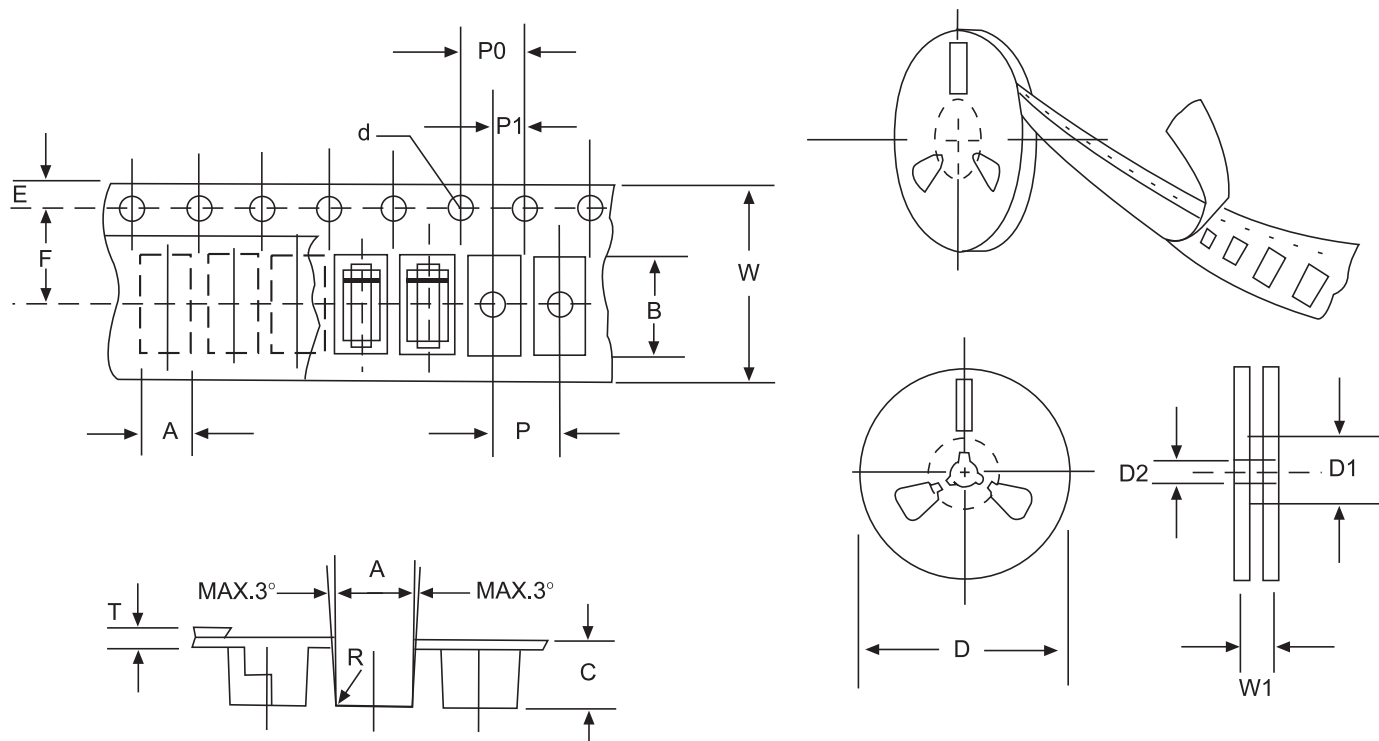


Fig:CONFIGURATION OF FLAT MELF TAPING

ITEM	SYMBOL	SMAG mm(inch)
Carrier width	A	2.79±0.1(0.110±0.004)
Carrier length	B	5.33±0.1(0.210±0.004)
Carrier depth	C	2.36±0.1(0.093±0.004)
Sprocket hole	d	1.55±0.05(0.061±0.002)
Reel outside diameter	D	279±2.0 (11± 0.079)
Reel inner diameter	D1	75±1.0 (2.95 ±0.039)
Feed hole diameter	D2	13±0.5(0.512±0.020)
Strocket hole position	E	1.75±0.1(0.069±0.004)
Punch hole position	F	5.5±0.05(0.217±0.002)
Punch hole pitch	P	4.0±0.1(0.157±0.004)
Sprocket hole pitch	P0	4.0±0.1(0.157±0.004)
Embossment center	P1	2.0±0.1(0.079±0.004)
Totall tape thickness	T	0.28±0.02(0.011±0.0008)
Tape width	W	12.0±0.2(0.472±0.008)
Reel width	W1	16.8±2.0(0.661±0.079)

NOTE:Devices are packde in accordance with EIA standard RS-481-A and specification given above.