


TO-220-3L Plastic-Encapsulate Transistors


TRANSISTOR (NPN)

FEATURES

- Medium Power Linear Switching Applications

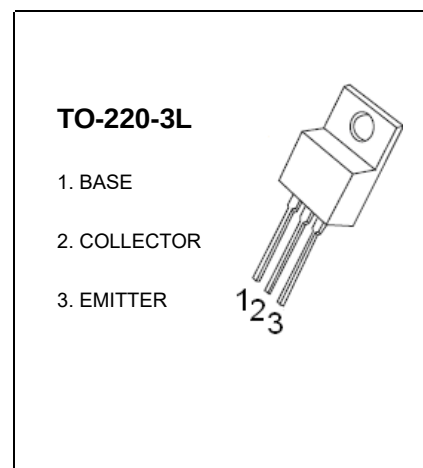


MARKING

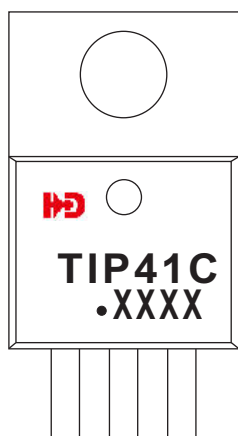

TIP41C=Device code Solid dot=Green moldinn compound device, if none,the normal device
XXXX=Code

Equivalent Circuit











MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CB0}	Collector-Base Voltage	100	V
V _{CEO}	Collector-Emitter Voltage	100	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current -Continuous	6	A
P _C	Collector Power Dissipation	2	W
R _{θJA}	Thermal Resistance From Junction To Ambient	62.5	°C/W
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C


ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 1\text{mA}, I_E = 0$	100		V
Collector-emitter breakdown voltage	$V_{CEO(sus)}$	$I_C = 30\text{mA}, I_B = 0$	100		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 1\text{mA}, I_C = 0$	5		V
Collector cut-off current	I_{CBO}	$V_{CB} = 100\text{V}, I_E = 0$		0.4	mA
Collector cut-off current	I_{CEO}	$V_{CE} = 60\text{V}, I_B = 0$		0.7	mA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$		1	mA
DC current gain	$h_{FE(1)}$	$V_{CE} = 4\text{V}, I_C = 0.3\text{A}$	30		
	$h_{FE(2)}$	$V_{CE} = 4\text{V}, I_C = 3\text{A}$	15	75	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 6\text{A}, I_B = 0.6\text{A}$		1.5	V
Base-emitter voltage	$V_{BE(on)}$	$V_{CE} = 4\text{V}, I_C = 6\text{A}$		2	V
Transition frequency	f_T	$V_{CE} = 10\text{V}, I_C = 0.5\text{A}$ $f = 1\text{MHz}$	3		MHz

Typical Characteristics

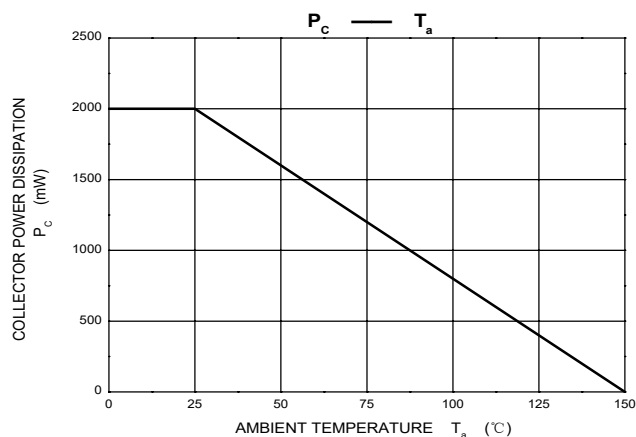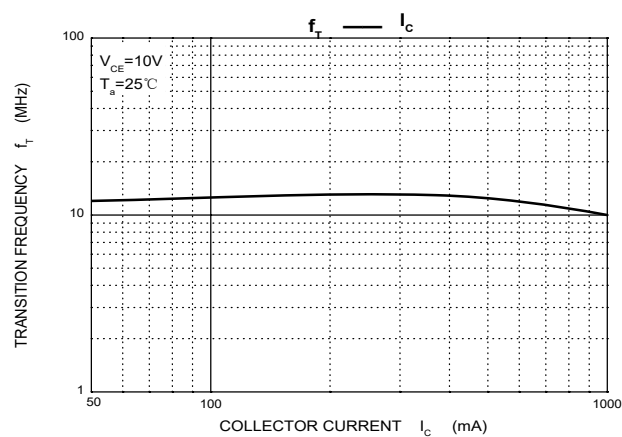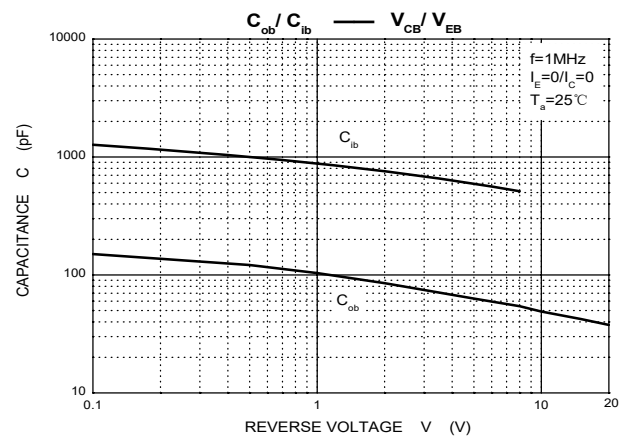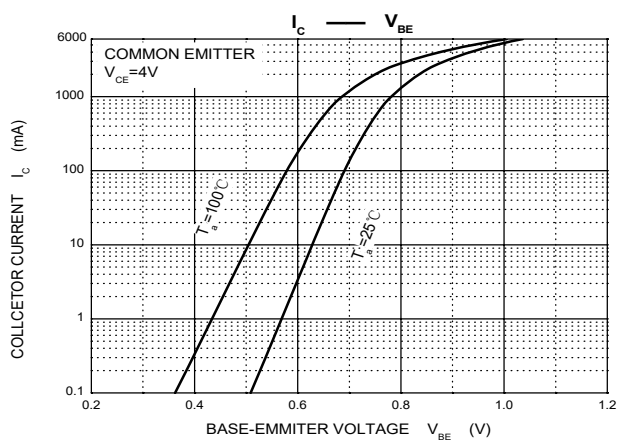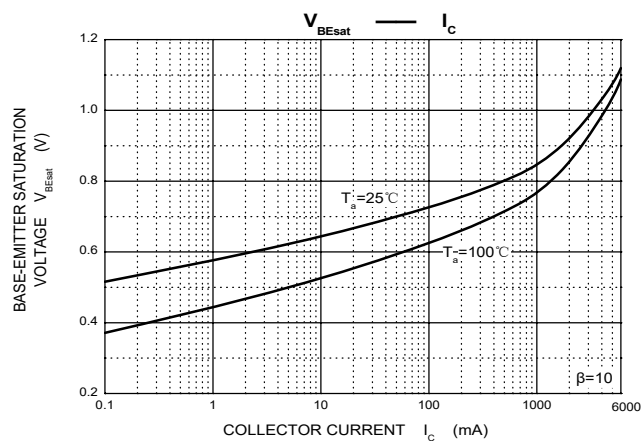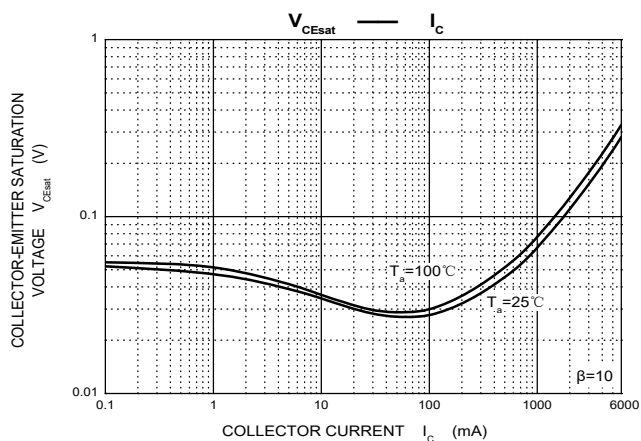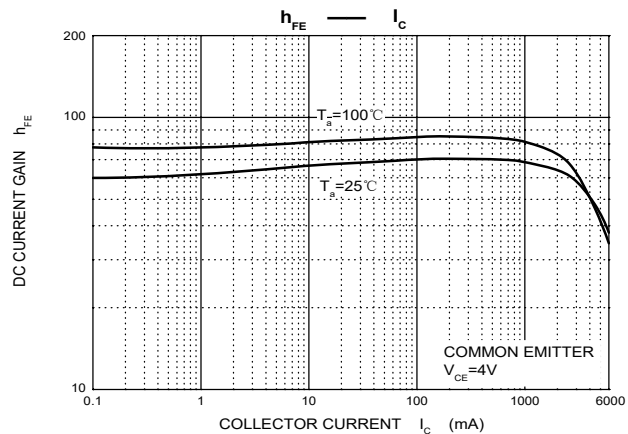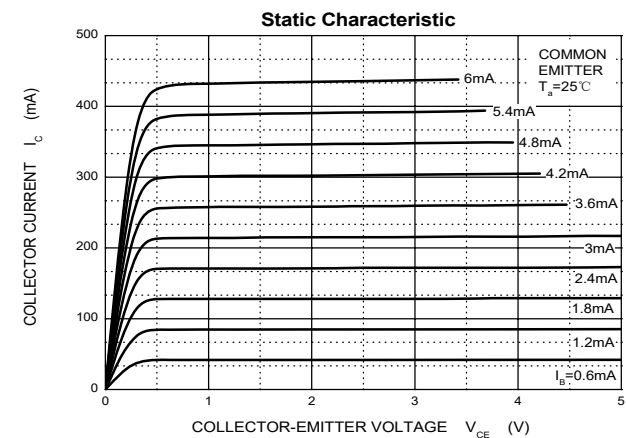

TO- 220- 3L Package Outline Dimensions

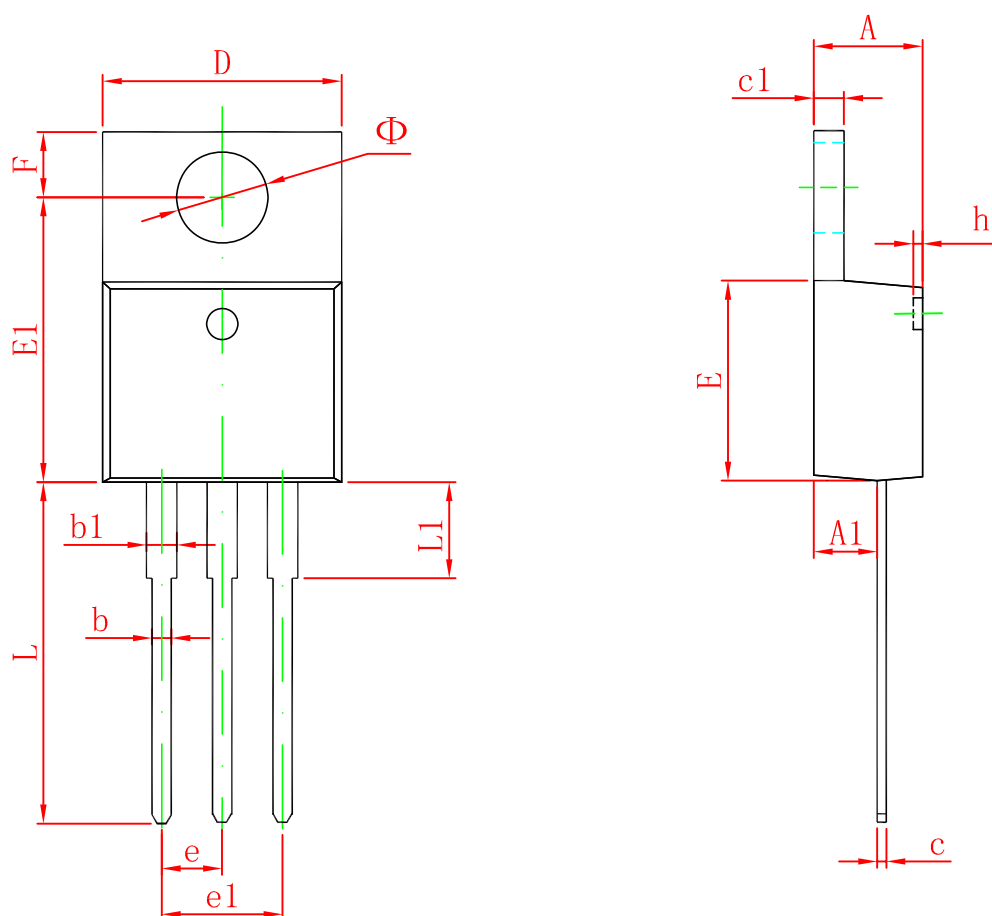

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
Φ	3.735	3.935	0.147	0.155