



## TO-18 Plastic-Encapsulate Transistors

### FEATURES


- Medium Power Complementary Silicon Transistors

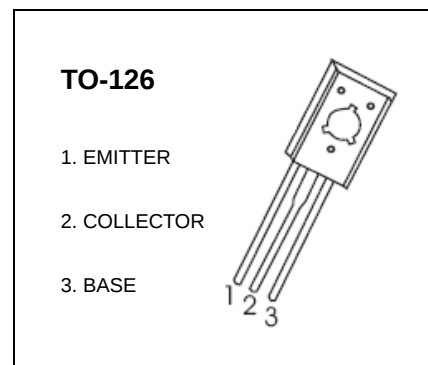

### MARKING



TIP122 , TIP127=Device code  
Solid dot = Green molding compound device, if none, the normal device  
XX=Code

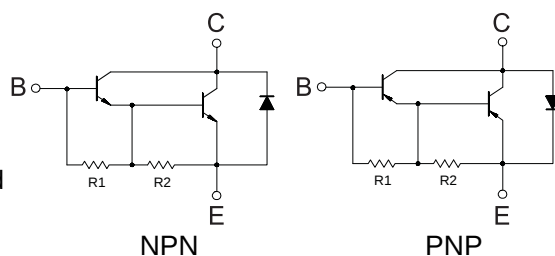

R1 typ. =5 K $\Omega$  R2 typ. =210 $\Omega$

R1 typ. =5 K $\Omega$  R2 typ. =210 $\Omega$

### MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted)

| Symbol                            | Parameter                                        | TIP122   | TIP127 | Unit |
|-----------------------------------|--------------------------------------------------|----------|--------|------|
| V <sub>CBO</sub>                  | Collector-Base Voltage                           | 100      | -100   | V    |
| V <sub>CEO</sub>                  | Collector-Emitter Voltage                        | 100      | -100   | V    |
| V <sub>EBO</sub>                  | Emitter-Base Voltage                             | 5        | -5     | V    |
| I <sub>C</sub>                    | Collector Current -Continuous                    | 5        | -5     | A    |
| P <sub>C</sub> *                  | Collector Power Dissipation                      | 1.25     |        | W    |
| R <sub>θJA</sub>                  | Thermal Resistance Junction to Ambient           | 100      |        | °C/W |
| R <sub>θJC</sub>                  | Thermal Resistance Junction to Case              | 8.33     |        | °C/W |
| T <sub>J</sub> , T <sub>stg</sub> | Operation Junction and Storage Temperature Range | -55~+150 |        | °C   |

## ELECTRICAL CHARACTERISTICS


$T_a=25^\circ\text{C}$  unless otherwise specified

| TIP122                               |                |                                             |      |       | NPN  |
|--------------------------------------|----------------|---------------------------------------------|------|-------|------|
| Parameter                            | Symbol         | Test conditions                             | Min  | Max   | Unit |
| Collector-base breakdown voltage     | $V_{(BR)CBO}$  | $I_C=1\text{mA}, I_E=0$                     | 100  |       | V    |
| Collector-emitter breakdown voltage  | $V_{CEO(SUS)}$ | $I_C=30\text{mA}, I_B=0$                    | 100  |       | V    |
| Collector cut-off current            | $I_{CBO}$      | $V_{CB}=100\text{V}, I_E=0$                 |      | 0.2   | mA   |
| Collector cut-off current            | $I_{CEO}$      | $V_{CE}=50\text{V}, I_B=0$                  |      | 0.5   | mA   |
| Emitter cut-off current              | $I_{EBO}$      | $V_{EB}=5\text{V}, I_C=0$                   |      | 2     | mA   |
| DC current gain                      | $h_{FE(1)}$    | $V_{CE}=3\text{V}, I_C=0.5\text{A}$         | 1000 |       |      |
|                                      | $h_{FE(2)}$    | $V_{CE}=3\text{V}, I_C=3\text{A}$           | 1000 | 12000 |      |
| Collector-emitter saturation voltage | $V_{CE(sat)}$  | $I_C=3\text{A}, I_B=12\text{mA}$            |      | 2     | V    |
|                                      |                | $I_C=5\text{A}, I_B=20\text{mA}$            |      | 4     |      |
| Base-emitter voltage                 | $V_{BE}$       | $V_{CE}=3\text{V}, I_C=3\text{A}$           |      | 2.5   | V    |
| Output Capacitance                   | $C_{ob}$       | $V_{CB}=10\text{V}, I_E=0, f=0.1\text{MHz}$ |      | 200   | pF   |


| TIP127                               |                |                                              |      |       | PNP  |
|--------------------------------------|----------------|----------------------------------------------|------|-------|------|
| Parameter                            | Symbol         | Test conditions                              | Min  | Max   | Unit |
| Collector-base breakdown voltage     | $V_{(BR)CBO}$  | $I_C=-1\text{mA}, I_E=0$                     | -100 |       | V    |
| Collector-emitter breakdown voltage  | $V_{CEO(SUS)}$ | $I_C=-30\text{mA}, I_B=0$                    | -100 |       | V    |
| Collector cut-off current            | $I_{CBO}$      | $V_{CB}=-100\text{V}, I_E=0$                 |      | -0.2  | mA   |
| Collector cut-off current            | $I_{CEO}$      | $V_{CE}=-50\text{V}, I_B=0$                  |      | -0.5  | mA   |
| Emitter cut-off current              | $I_{EBO}$      | $V_{EB}=-5\text{V}, I_C=0$                   |      | -2    | mA   |
| DC current gain                      | $h_{FE(1)}$    | $V_{CE}=-3\text{V}, I_C=-0.5\text{A}$        | 1000 |       |      |
|                                      | $h_{FE(2)}$    | $V_{CE}=-3\text{V}, I_C=-3\text{A}$          | 1000 | 12000 |      |
| Collector-emitter saturation voltage | $V_{CE(sat)}$  | $I_C=-3\text{A}, I_B=-12\text{mA}$           |      | -2    | V    |
|                                      |                | $I_C=-5\text{A}, I_B=-20\text{mA}$           |      | -4    |      |
| Base-emitter voltage                 | $V_{BE}$       | $V_{CE}=-3\text{V}, I_C=-3\text{A}$          |      | -2.5  | V    |
| Output Capacitance                   | $C_{ob}$       | $V_{CB}=-10\text{V}, I_E=0, f=0.1\text{MHz}$ |      | 300   | pF   |

\* This test is performed with no heat sink at  $T_a=25^\circ\text{C}$ .

TIP122

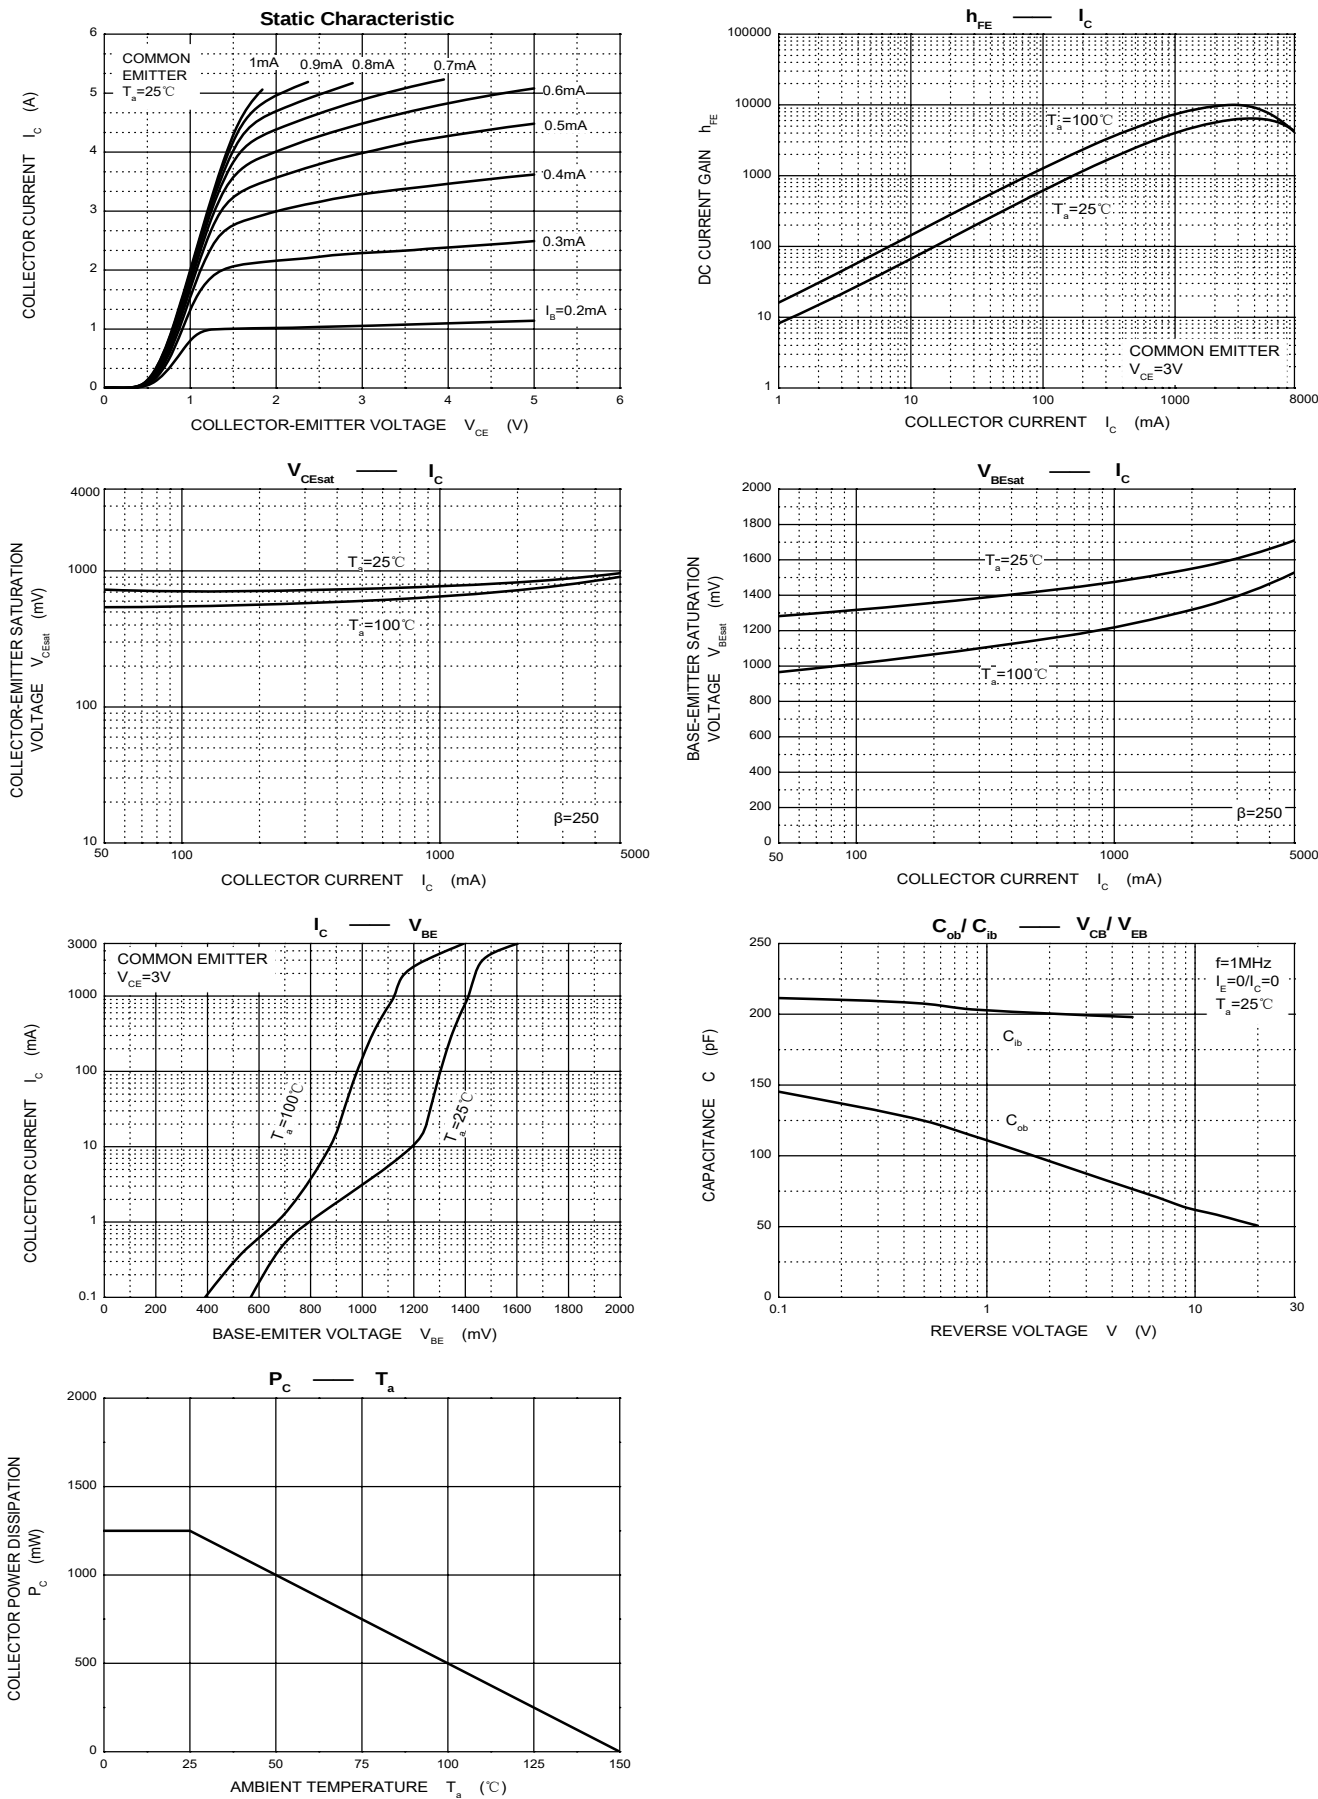

## TO-126 Package Outline Dimensions

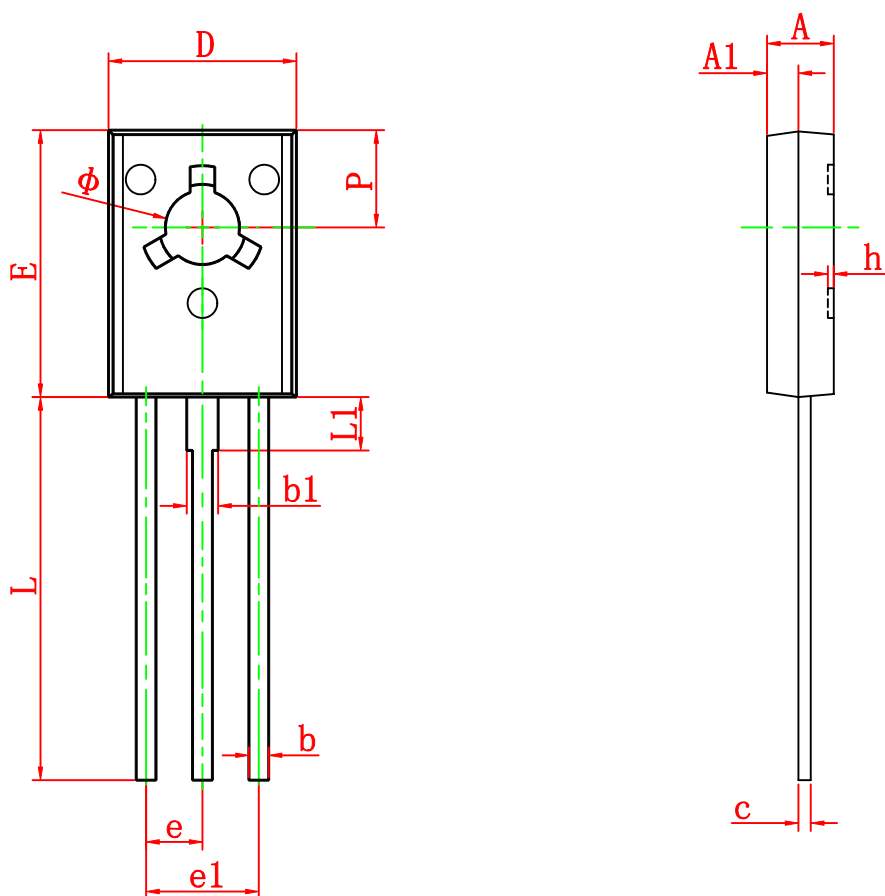

| Symbol | Dimensions In Millimeters |        | Dimensions In Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min                       | Max    | Min                  | Max   |
| A      | 2.500                     | 2.900  | 0.098                | 0.114 |
| A1     | 1.100                     | 1.500  | 0.043                | 0.059 |
| b      | 0.660                     | 0.860  | 0.026                | 0.034 |
| b1     | 1.170                     | 1.370  | 0.046                | 0.054 |
| c      | 0.450                     | 0.600  | 0.018                | 0.024 |
| D      | 7.400                     | 7.800  | 0.291                | 0.307 |
| E      | 10.600                    | 11.000 | 0.417                | 0.433 |
| e      | 2.290 TYP                 |        | 0.090 TYP            |       |
| e1     | 4.480                     | 4.680  | 0.176                | 0.184 |
| h      | 0.000                     | 0.300  | 0.000                | 0.012 |
| L      | 15.300                    | 15.700 | 0.602                | 0.618 |
| L1     | 2.100                     | 2.300  | 0.083                | 0.091 |
| P      | 3.900                     | 4.100  | 0.154                | 0.161 |
| $\Phi$ | 3.000                     | 3.200  | 0.118                | 0.126 |