


GBP Plastic-Encapsulate Bridge Rectifier

Features

- I_O 1.5A
- VRRM 50V-1000V
- High surge current capability
- Ultra low leakage reverse current
- Ideal for printed circuit boards

Mechical Data

- Case: GBP molded plastic
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Leads solderable per MIL-STD-750
- Mounting position: Any

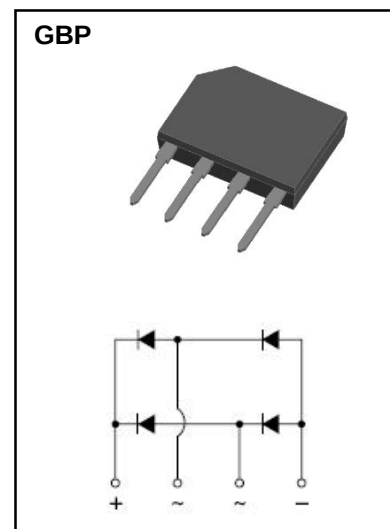

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	GBP						
				005	01	02	04	06	08	10
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V		35	70	140	280	420	560	700
Maximum DC blocking Voltage	V_{DC}	V		50	100	200	400	600	800	1000
Average Rectified Output Current	I_O	A	60Hz sine wave, R-load, $T_c=100^{\circ}C$	1.5						
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz sine wave, 1 cycle, $T_j=25^{\circ}C$	50						
Current Squared Time	I^2t	A ² S	$1ms \leq t < 8.3ms$ $T_j=25^{\circ}C$, Rating of per diode	10.375						
Storage Temperature	T_{stg}	$^{\circ}C$		-55 ~+150						
Junction Temperature	T_j	$^{\circ}C$		-55 ~+150						

Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition		Max
Peak Forward Voltage	V_{FM}	V	$I_{FM}=1A$, Pulse measurement, Rating of per diode		1.1
Peak Reverse Current	I_{RRM1}	μA	$V_{RM}=V_{RRM}$	$T_a=25^{\circ}C$	10
	I_{RRM2}			$T_a=125^{\circ}C$	500
Thermal Resistance	$R_{\theta J-A}$	$^{\circ}C/W$	Between junction and ambient		47
	$R_{\theta J-C}$		Between junction and lead		10

Typical Characteristics

FIG.1-FORWARD CURRENT DERATING CURVE

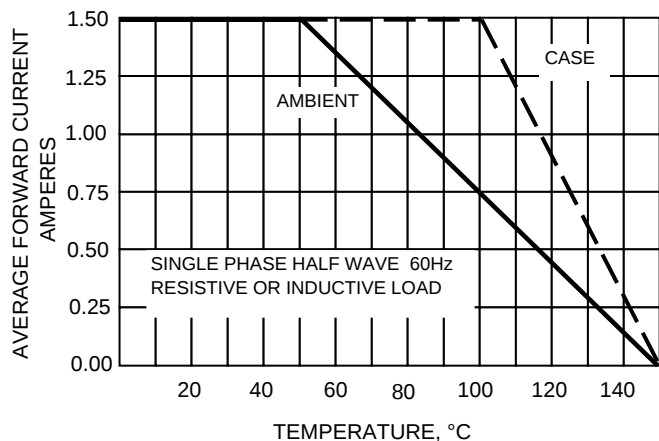


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

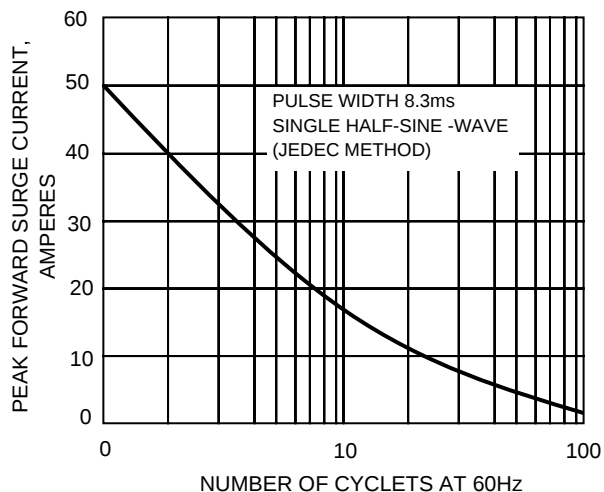


FIG.3-TYPICAL JUNCTION CAPACITANCE

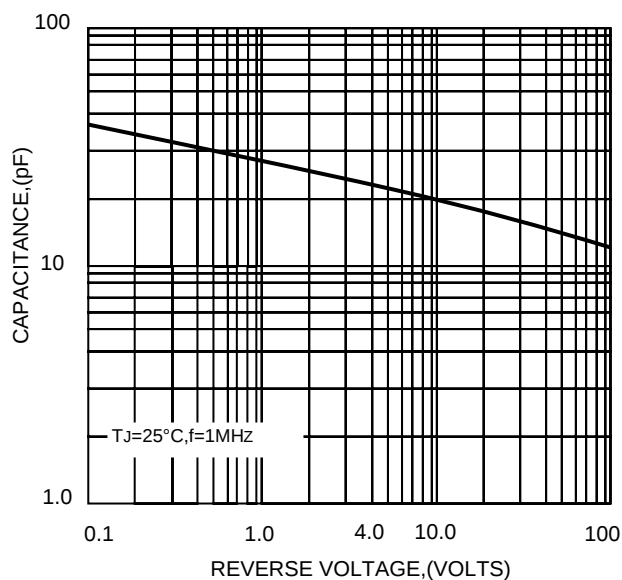


FIG.4-TYPICAL FORWARD CHARACTERISTICS



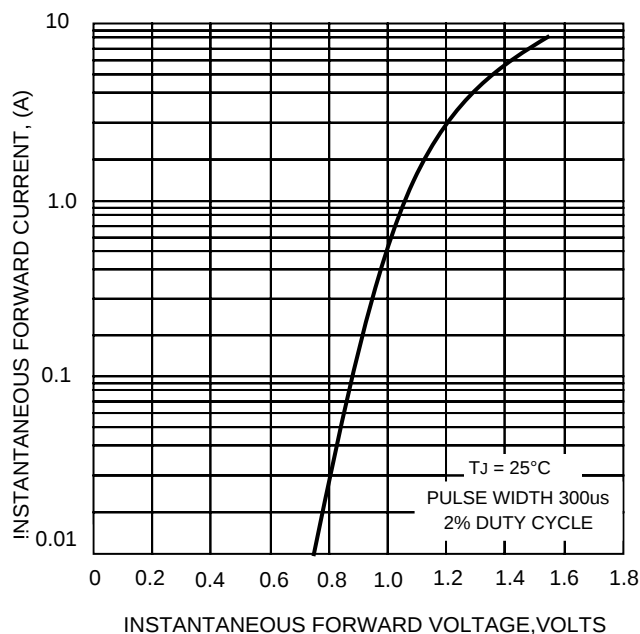


FIG.5-TYPICAL REVERSE CHARACTERISTICS

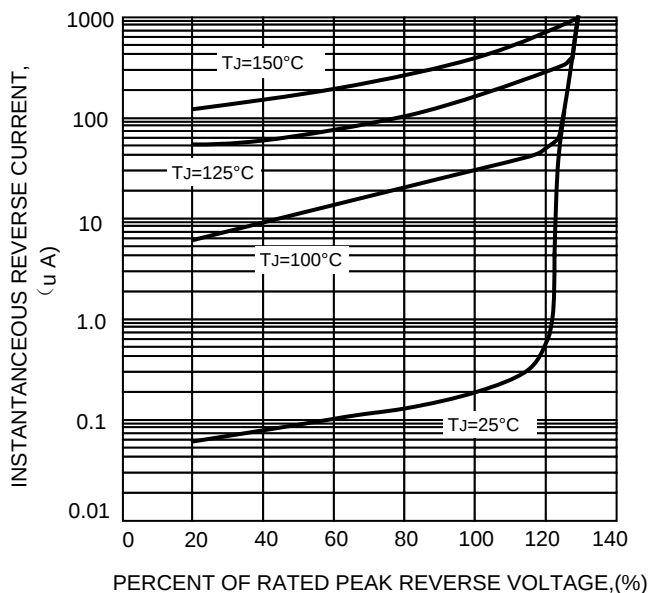

GBP Package Outline Dimensions

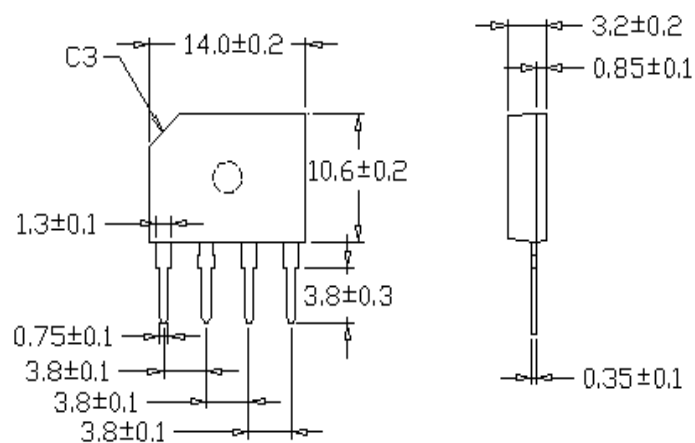

Dimensions in inches and (millimeters)

NOTICE

JSHD reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein .JSHD does not assume any liability arising out of the application or use of any product described herein.