

SOT-323 Plastic-Encapsulate MOSFET

20V P-Channel MOSFET

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-20V	68mΩ@-4.5V	-1.4A
	92mΩ@-2.5V	
	130mΩ@-1.8V	


Feature

- Leading Trench Technology for Low $R_{DS(on)}$
- Extending Battery Life

Application

- High Side Load Switch
- Charging Circuit
- Single Cell Battery Applications

MARKING:

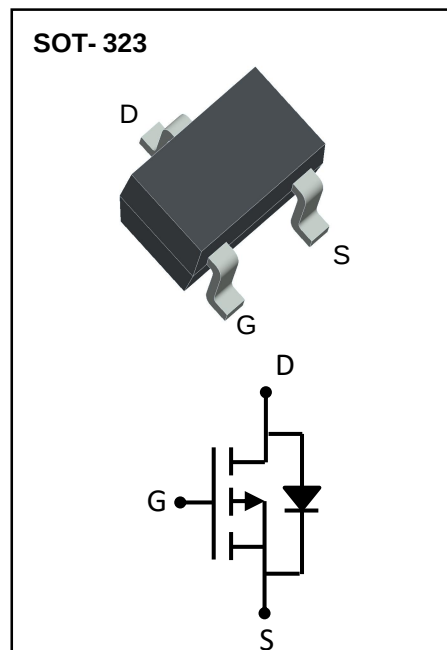

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	±10	V
Continuous Drain Current ^{1,2}	I_D	-1.4	A
Pulsed Drain Current	I_{DM}	-5.6	A
Power Dissipation	P_D	0.57	W
Thermal Resistance from Junction to Ambient ^{1,2}	$R_{\theta JA}$	220	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~+150	°C







Electrical Characteristics (T_A=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} = -16V, V _{GS} = 0V			-1	μA
Gate-body leakage current	I _{GSS}	V _{GS} = ±8V, V _{DS} = 0V			±100	nA
On Characteristics ³						
Gate threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-0.4	-0.7	-1.0	V
Drain-source on-resistance	R _{DS(on)}	V _{GS} = -4.5V, I _D = -1.0A		68	90	mΩ
		V _{GS} = -2.5V, I _D = -0.5A		92	120	
		V _{GS} = -1.8V, I _D = -0.3A		130	195	
Forward tranconductance	g _{FS}	V _{DS} = -5V, I _D = -1.4A	8			S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} = -10V, V _{GS} = 0V, f = 1MHz		350		pF
Output Capacitance	C _{oss}			75		
Reverse Transfer Capacitance	C _{rss}			67		
Switching Characteristics						
Turn-on delay time	t _{d(on)}	V _{GS} = -4.5V, V _{DD} = -10V, I _D = -1.4A, R _G =3Ω		7.0		ns
Turn-on rise time	t _r			32		
Turn-off delay time	t _{d(off)}			49		
Turn-off fall time	t _f			55		
Total Gate Charge	Q _g	V _{DS} = -10V, V _{GS} = -4.5V, I _D = -1.4A		8.2		nC
Gate-Source Charge	Q _{gs}			1.1		
Gate-Drain Charge	Q _{gd}			2.0		
Diode Characteristics						
Diode Forward voltage ³	V _{DS}	V _{GS} = 0V, I _S = -0.3A			-1.2	V


Notes :

- 1.R_{θJA} is measured with the device mounted on 1 in² FR4 board with 1oz. single side copper, in a still air environment with T_A = 25°C.
- 2.R_{θJA} is measured in the steady state
- 3.Pulse test : Pulse width ≤ 380μs, duty cycle ≤ 2%.

Typical Characteristics

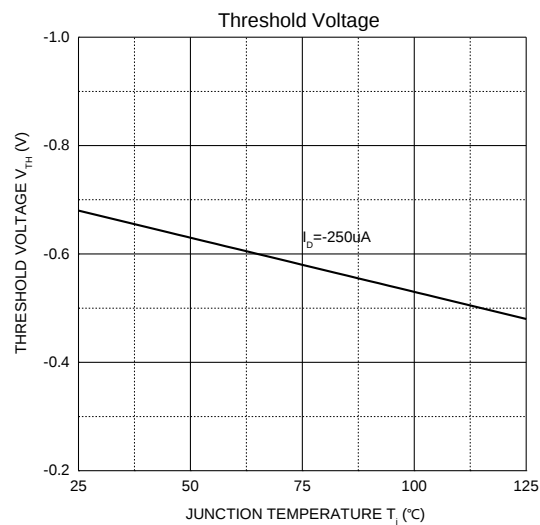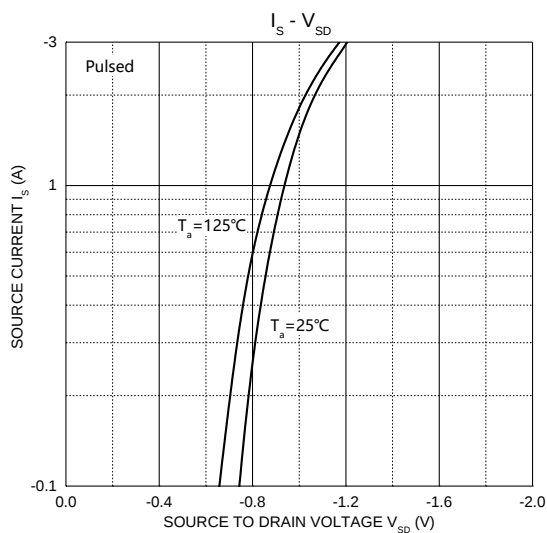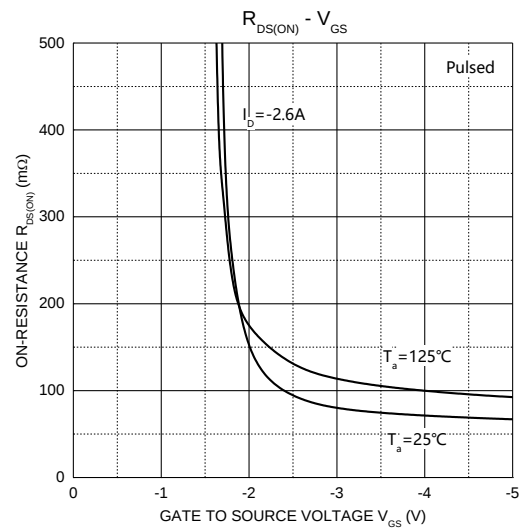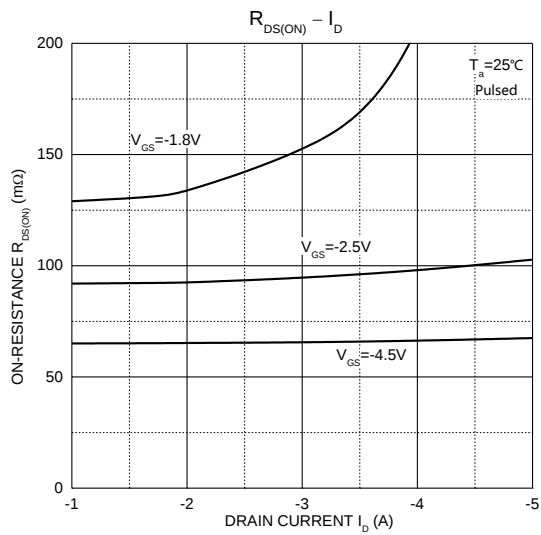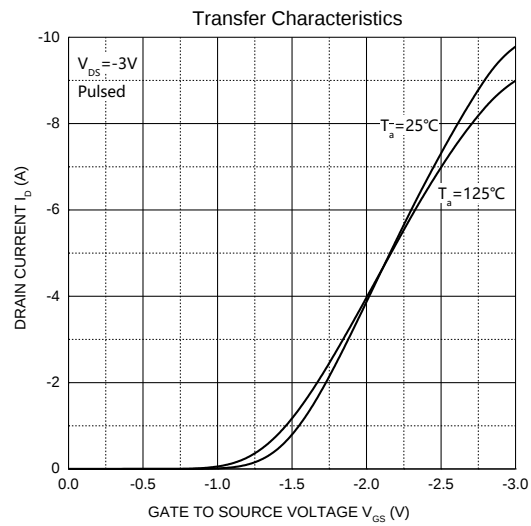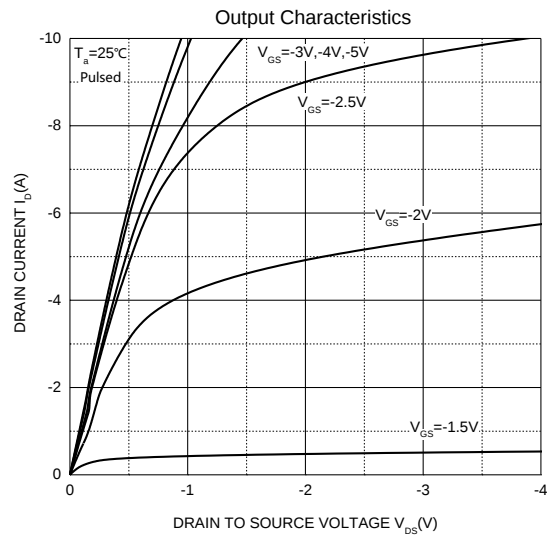


SOT-323 Package Outline Dimensions

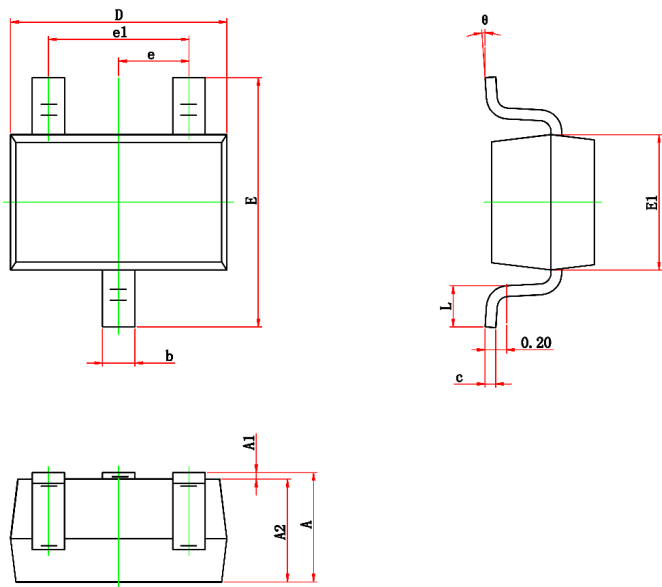

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.050	0.150	0.002	0.006
D	1.900	2.200	0.075	0.087
E	2.000	2.450	0.079	0.096
E1	1.150	1.350	0.045	0.053
e	0.650TYP.		0.026TYP.	
e1	1.200	1.400	0.047	0.055
L	0.200	0.460	0.008	0.018
θ	0°	8°	0°	8°

SOT-323 Suggested Pad Layout

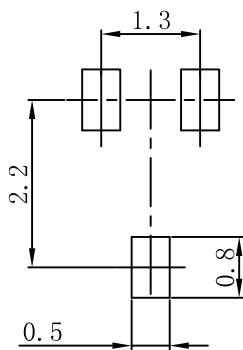

- Note:**
- 1.Controlling dimension:in millimeters.
 - 2.General tolerance:± 0.05mm.
 - 3.The pad layout is for reference purposes only.

NOTICE

JSJD reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein .JSJD does not assume any liability arising out of the application or use of any product described herein.