

## TO-252-2L Plastic-Encapsulate Diodes

**HALOGEN FREE**

SUPER FAST RECOVER RECTIFIER


### MAIN CHARACTERISTICS

$I_O$	10A
$V_{RRM}$	1200V
$T_{rr}$	28ns
$T_j$	175°C
$V_{F(typ)}$	1.8V(@ $T_j=150^\circ\text{C}$ )


### FEATURES

- Ultrafast Recovery Times and Low Recovery Loss
- Low Forward Voltage
- Low Reverse Leakage Current

### MARKING



MURD10H120= Device code  
 Solid dot = Green molding compound device  
 if none, the normal device  
 XXXX = Code

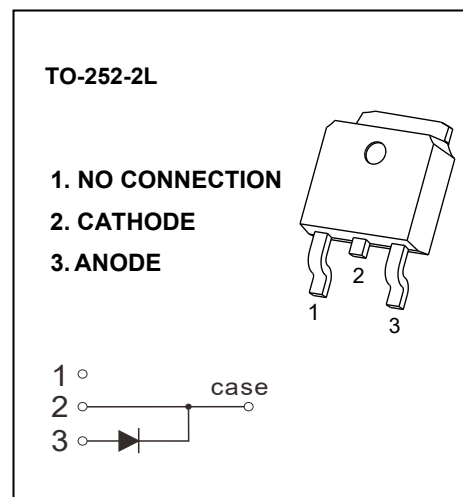

### MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ unless otherwise noted )


Symbol	Parameter	MURD10H120	Unit
$V_{RRM}$	Peak Repetitive Reverse Voltage	1200	V
$V_R$	DC Blocking Voltage		
$I_{F(AV)}$	Average Forward Current( $T_C=142^\circ\text{C}$ )	10	A
$I_{FSM}$	Non-Repetitive Surge Forward Current (8.3ms)	100	A
$P_D$	Power dissipation	65	W
$R_{\theta JC}$	Thermal Resistance From Junction to Case	2.3	$^\circ\text{C}/\text{W}$
$T_j$	Operating Junction Temperature Range	-55 ~ +175	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55 ~ +175	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)}$	Reverse Voltage	$I_R=100\mu\text{A}$	1200			V
$I_R$	Reverse Current	$V_R=1200\text{V}$	$T_j=25^\circ\text{C}$		10	$\mu\text{A}$
			$T_j=150^\circ\text{C}$		500	$\mu\text{A}$
$V_F$	Forward Voltage	$I_F=10\text{A}$	$T_j=25^\circ\text{C}$	2.5	3.5	V
			$T_j=150^\circ\text{C}$	1.8		V
$C_{tot}$	Total Capacitance	$V_R=200\text{V}, f=1\text{MHz}$		6		pF
trr	Reverse Recovery time	$I_F=0.5\text{A}, I_R=1\text{A}, I_{rr}=0.25\text{A}$		28		ns
		$I_F=1\text{A}, V_R=30\text{V}, di_F/dt = 200\text{A}/\mu\text{s}$		23.5		ns

# Typical Characteristics


### Forward Characteristics

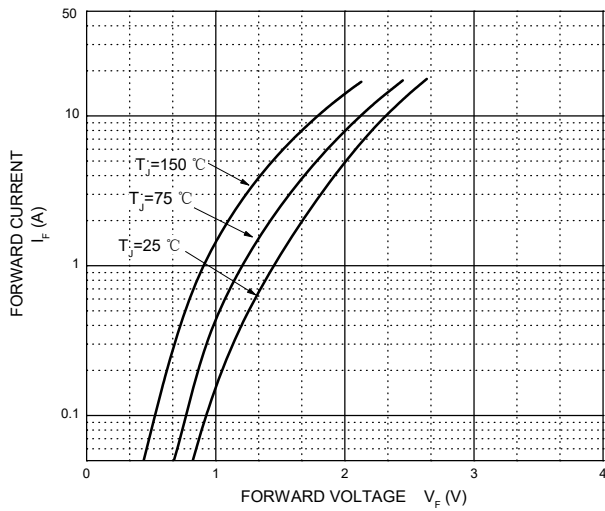


### Reverse Characteristics

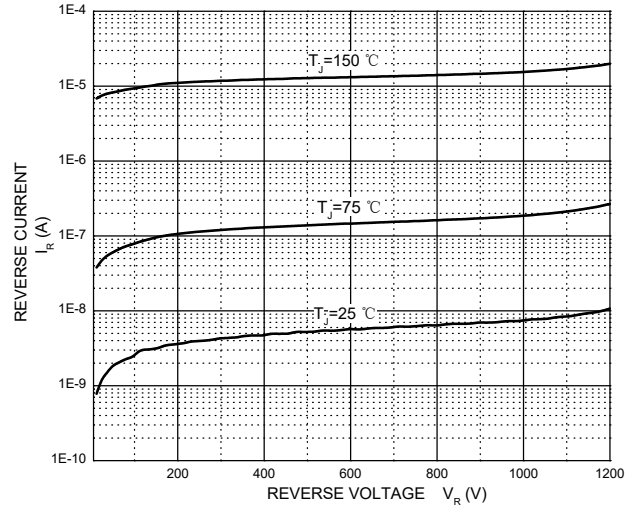


### Capacitance Characteristics Per Diode

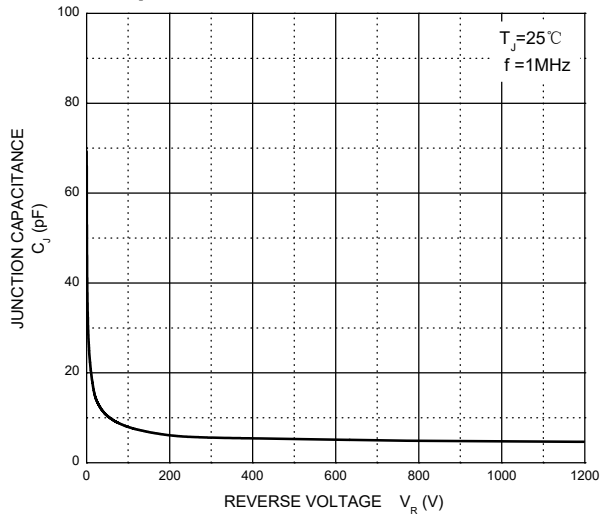


### Recovery Current vs. $di_F/dt$

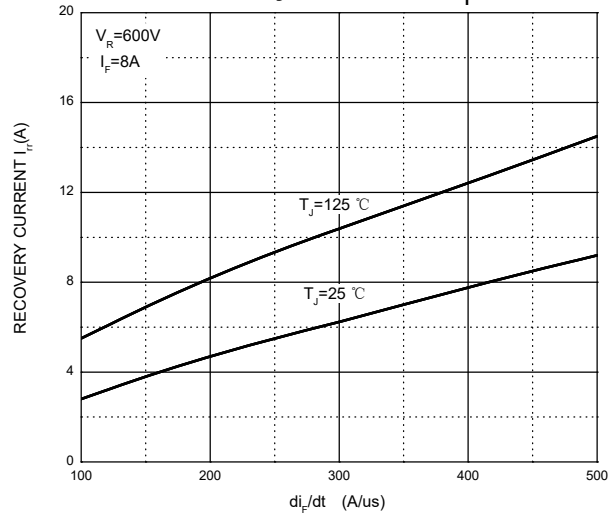


### Reverse Recovery Time vs. $di_F/dt$

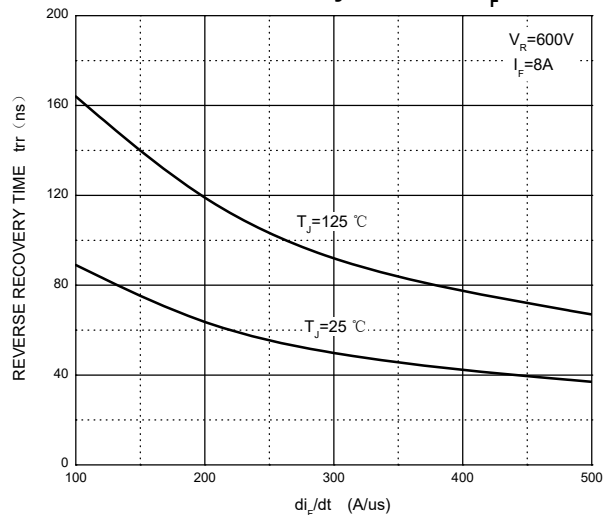

### Stored Charge vs. $di_F/dt$

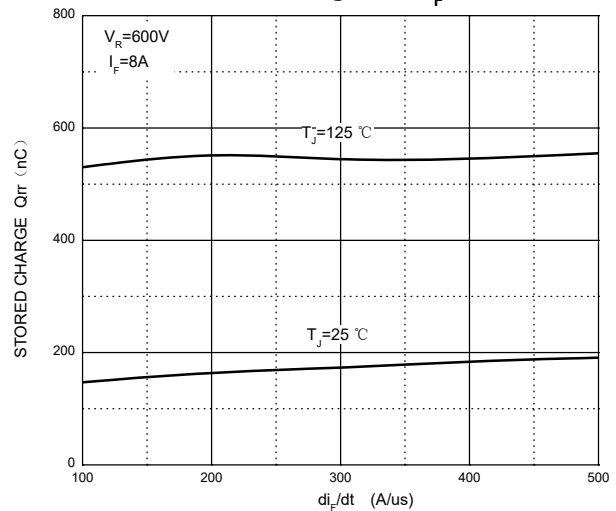


## TO-252-2L Package Outline Dimensions

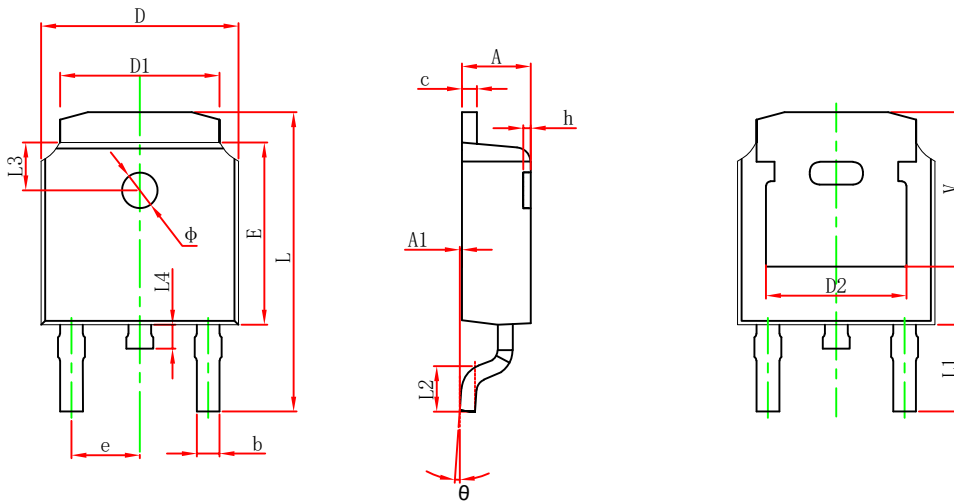

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.700	0.860	0.025	0.030
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.300	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.382	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
phi	1.100	1.300	0.043	0.051
theta	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	

## TO-252-2L Suggested Pad Layout

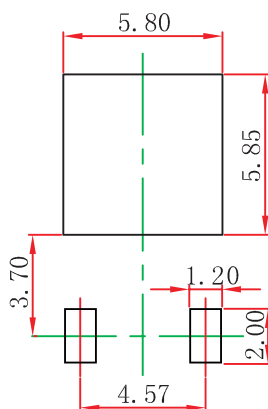

### Note:


1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

### NOTICE

JSJD reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

# TO-252-2L Tape and Reel

## TO-252 Embossed Carrier Tape

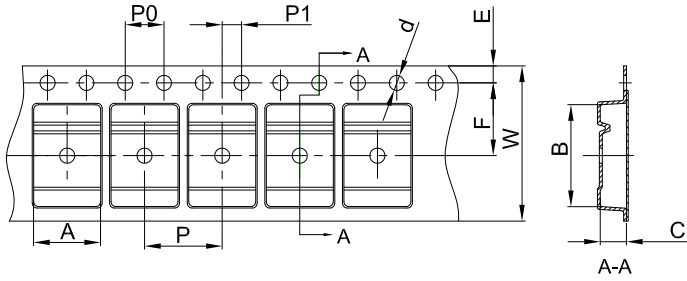


### Packaging Description:


TO-252 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 25,00 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Ø1.55	1.75	7.50	4.00	8.00	2.00	16.00

## TO-252 Tape Leader and Trailer

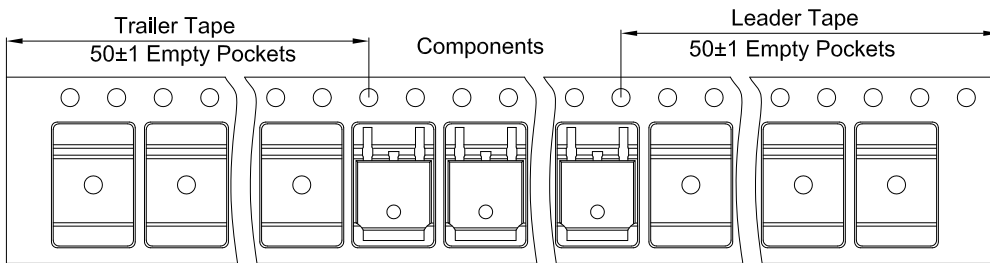

## TO-252 Reel

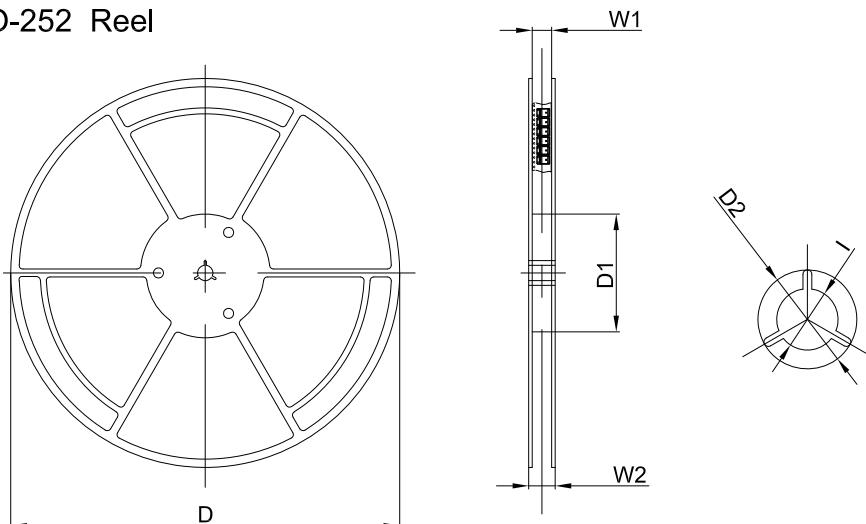

Dimensions are in millimeter						
Reel Option	D	D1	D2	W1	W2	I
13" Dia	330.00	100.00	Ø21.00	16.40	21.00	Ø13.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
2,500 pcs	13inch	2,500 pcs	340×336×29	25,000 pcs	353×346×365	